


Aquanta DX Five-Slot Configuration

| Jumpers : Pins | | Description: |
|--|--|--|
| <input type="checkbox"/> | CLK1: 1-2 OFF, 2-3 ON, CLK1: 1-2 OFF, 2-3 ON, FREQ1: 1-2 ON, 2-3 OFF FREQ2: 1-2 ON, 2-3 OFF | Pentium 75 Mhz: CPU Bus Clock Frequency (50 MHz): CPU Clock and Bus Clock Ratio Selection: CPU Clock and Bus Clock 50 MHz (1.5x) |
| <input type="checkbox"/> | CLK1: 1-2 OFF, 2-3 ON CLK2: 1-2 ON, 2-3 OFF FREQ1: 1-2 ON, 2-3 OFF FREQ2: 1-2 ON, 2-3 OFF | Pentium 90 Mhz: CPU Bus clock Frequency (60 MHz): CPU Clock and Bus Clock Ratio Selection: CPU Clock 90 Mhz; Bus Clock 60 MHz (1.5x) |
| <input type="checkbox"/> | CLK1: 1-2 ON, 2-3 OFF CLK2: 1-2 OFF, 2-3 ON FREQ1: 1-2 ON, 2-3 OFF FREQ2: 1-2 ON, 2-3 OFF | Pentium 100 Mhz: CPU Bus clock Frequency (66 MHz): CPU Clock and Bus Clock Ratio Selection: CPU Clock 100MHz; Bus Clock 66 MHz (1.5x) |
| <input type="checkbox"/> | CLK1: 1-2 OFF, 2-3 ON CLK2: 1-2 ON, 2-3 OFF FREQ1: 1-2 OFF, 2-3 ON FREQ2: 1-2 ON, 2-3 OFF | Pentium 120 Mhz: CPU Bus Clock Frequency (60 MHz): CPU Clock and Bus Clock Ratio Selection: CPU Clock 120 MHz; Bus Clock 60 MHz (2x) |
| <input type="checkbox"/> | CLK1: 1-2 ON, 2-3 OFF CLK2: 1-2 OFF, 2-3 ON FREQ1: 1-2 OFF, 2-3 ON FREQ2: 1-2 ON, 2-3 OFF | Pentium 133 Mhz: CPU Bus Clock Frequency (66 MHz): CPU Clock and Bus Clock Ratio Selection: CPU Clock 133MHz; Bus Clock 66 MHz (2x) |
| <input type="checkbox"/> | CLK1: 1-2 OFF, 2-3 ON CLK2: 1-2 ON, 2-3 OFF FREQ1: 1-2 OFF, 2-3 ON FREQ2: 1-2 OFF, 2-3 ON | Pentium 150 Mhz: CPU Bus Clock Frequency (60 MHz): CPU Clock and Bus Clock Ratio Selection: CPU Clock 150MHz; Bus Clock 60 MHz (2.5x) |
| <input type="checkbox"/> | CLK1: 1-2 ON, 2-3 OFF CLK2: 1-2 OFF, 2-3 ON FREQ1: 1-2 OFF, 2-3 ON FREQ2: 1-2 OFF, 2-3 ON | Pentium 166 Mhz: CPU Bus Clock Frequency (66 MHz): CPU Clock and Bus Clock Ratio Selection: CPU Clock 166 MHz; Bus Clock 66 MHz (2.5x) |
| <input type="checkbox"/> | CLK1: 1-2 ON, 2-3 OFF CLK2: 1-2 OFF, 2-3 ON FREQ1: 1-2 ON, 2-3 OFF FREQ2: 1-2 OFF, 2-3 ON | Pentium 200 Mhz: CPU Bus Clock Frequency (66 MHz): CPU clock and Bus Clock Ratio Selection: CPU Clock 200 MHz; Bus Clock 66 MHz (3x) |
| <input type="checkbox"/> | CLK1: 1-2 ON, 2-3 OFF CLK2: 1-2 OFF, 2-3 ON FREQ1: 1-2 ON, 2-3 OFF FREQ2: 1-2 ON, 2-3 OFF | Pentium 233 Mhz: CPU Bus clock Frequency (66 MHz): CPU Clock and Bus Clock Ratio Selection: CPU Clock 233MHz; Bus Clock 66 MHz (3.5x) |
| <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> | CPU Voltage Mode: VR1: 1-2 ON, 3-4 OFF 5-6 OFF, 7-8 OFF VR2: 1-2 ON, 3-4 ON, 5-6 OFF, 7-8 OFF VR1: 1-2 OFF, 3-4 ON, 5-6 OFF, 7-8 OFF VR2: 1-2 ON, 3-4 ON, 5-6 OFF, 7-8 OFF VR1: 1-2 OFF, 3-4 OFF, 5-6 ON, 7-8 OFF VR2: 1-2 OFF, 3-4 OFF, 5-6 ON, 7-8 ON | 3.49V (VRE) 3.384V (Standard, VR) 2.8V P55C, (MMX) |

| Jumpers : Pins | | Description: |
|---|---|--|
| <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> | Flash BIOS Chip: EP1: 2-3 ON EP2: NC EP1: 2-3 ON; EP2: 2-3 ON | SST 2Mbits SST29EE020 MX28F2000P |
| <input checked="" type="checkbox"/> <input type="checkbox"/> | SPRAM On Board: SRAM1: 1-2 ON SRAM1: 2-3 ON | 256KB 512KB |
| <input type="checkbox"/> <input checked="" type="checkbox"/> | Password Clear: CPS: 2-3 ON CPS: 1-2 ON | Enabled Disabled |

= Default Setting

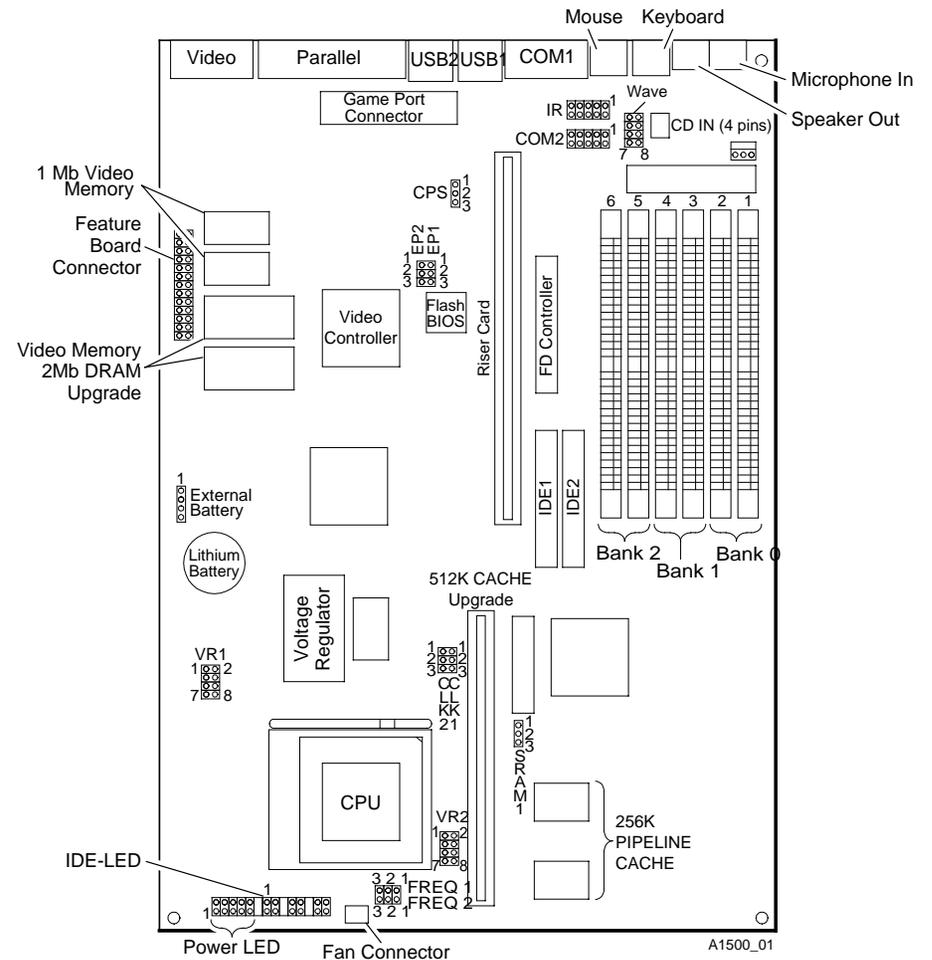

A1500_01