




Acrylic Parts



Base Feet
3015-AC-01

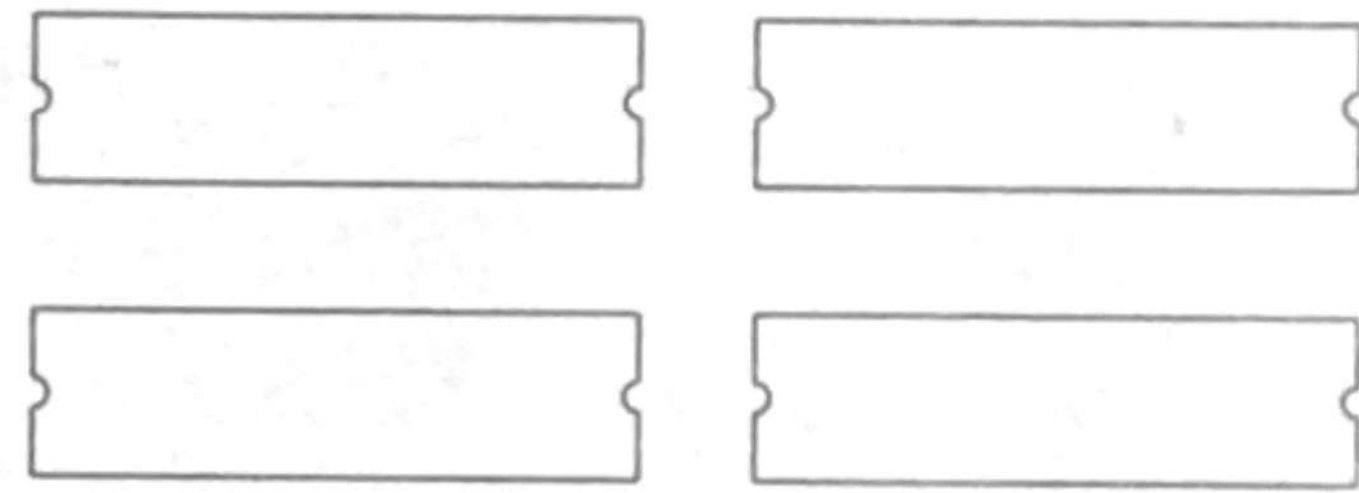


Long Cover Plate
3010-AC-03

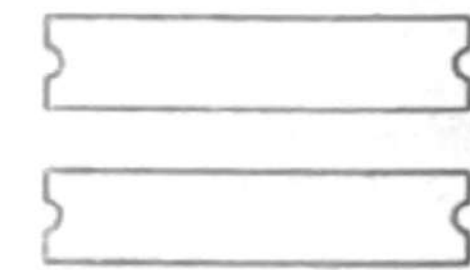


Small Cover Plate
3010-AC-04




Corner Blocks
3014-AC-01

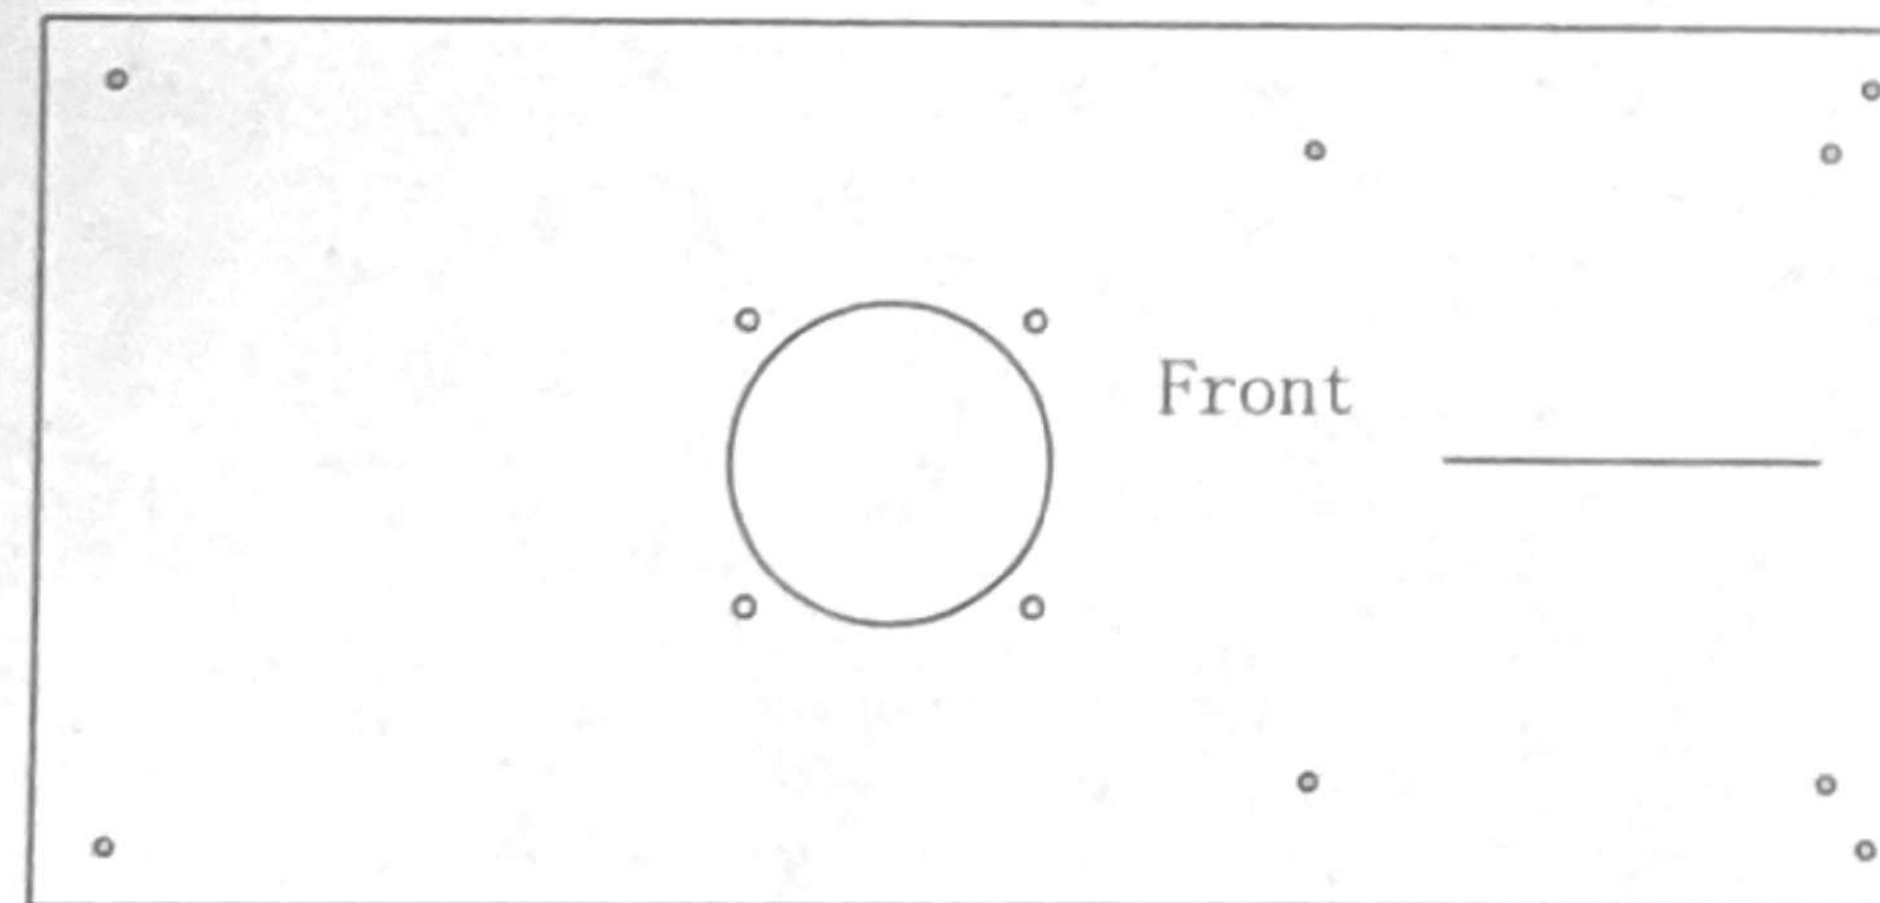


Top
3013-AC-03

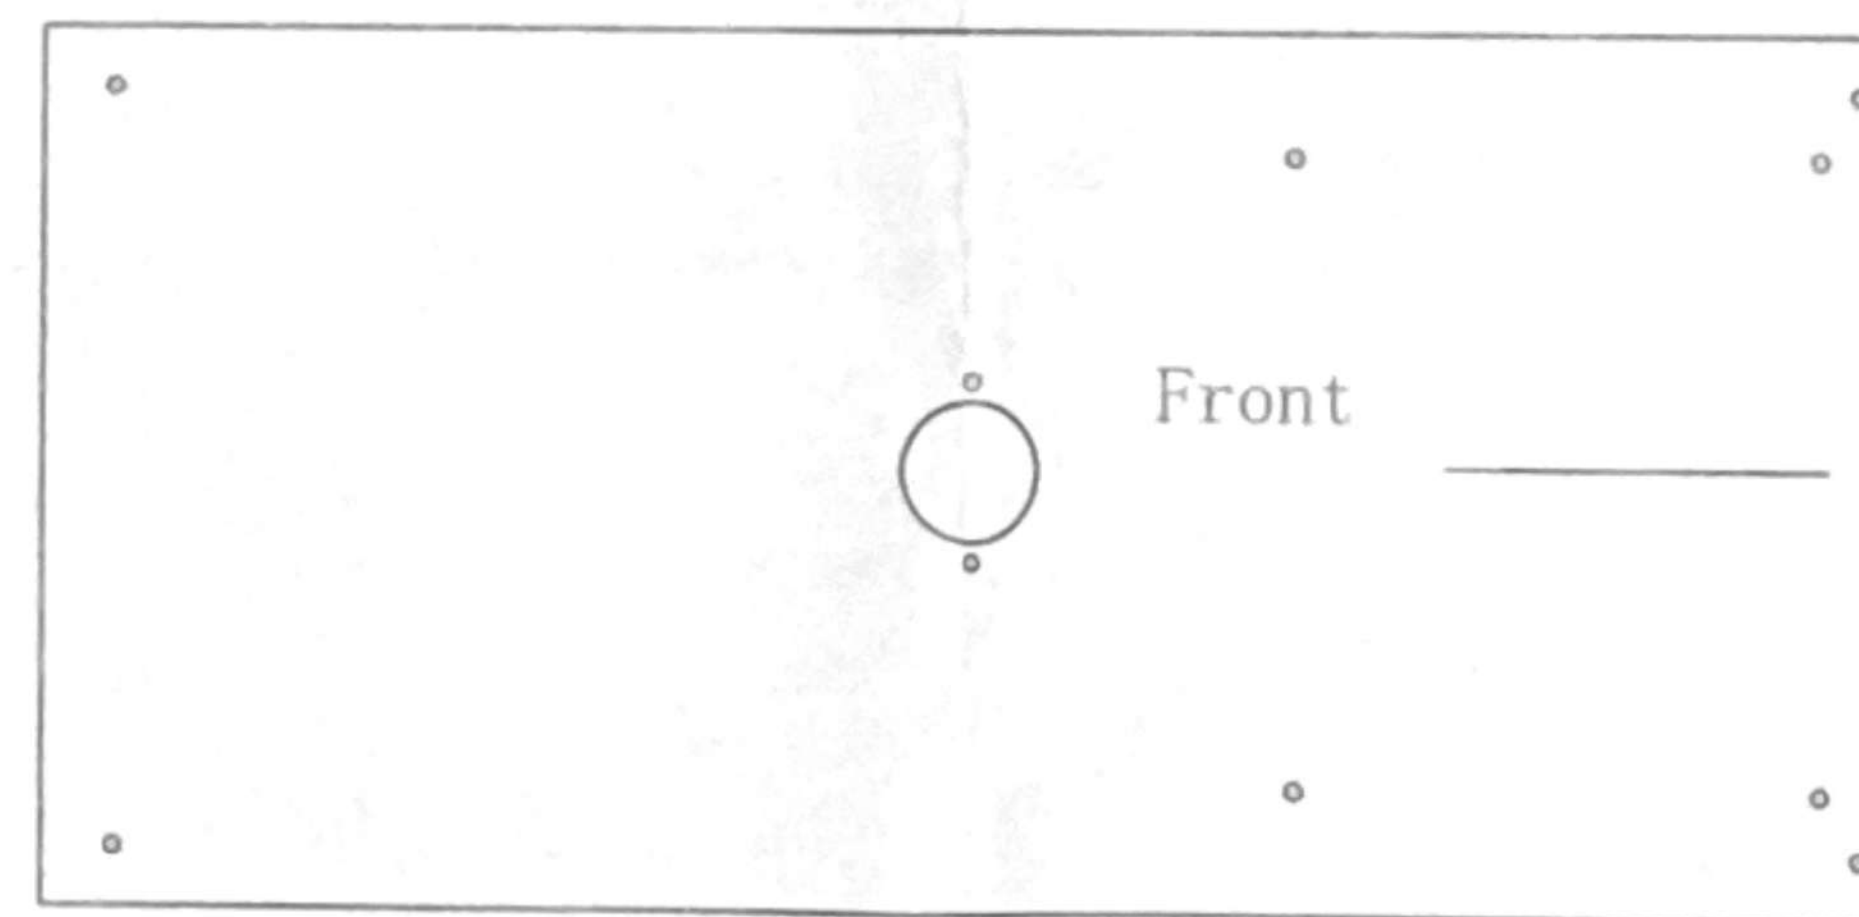

Bottom
3013-AC-04

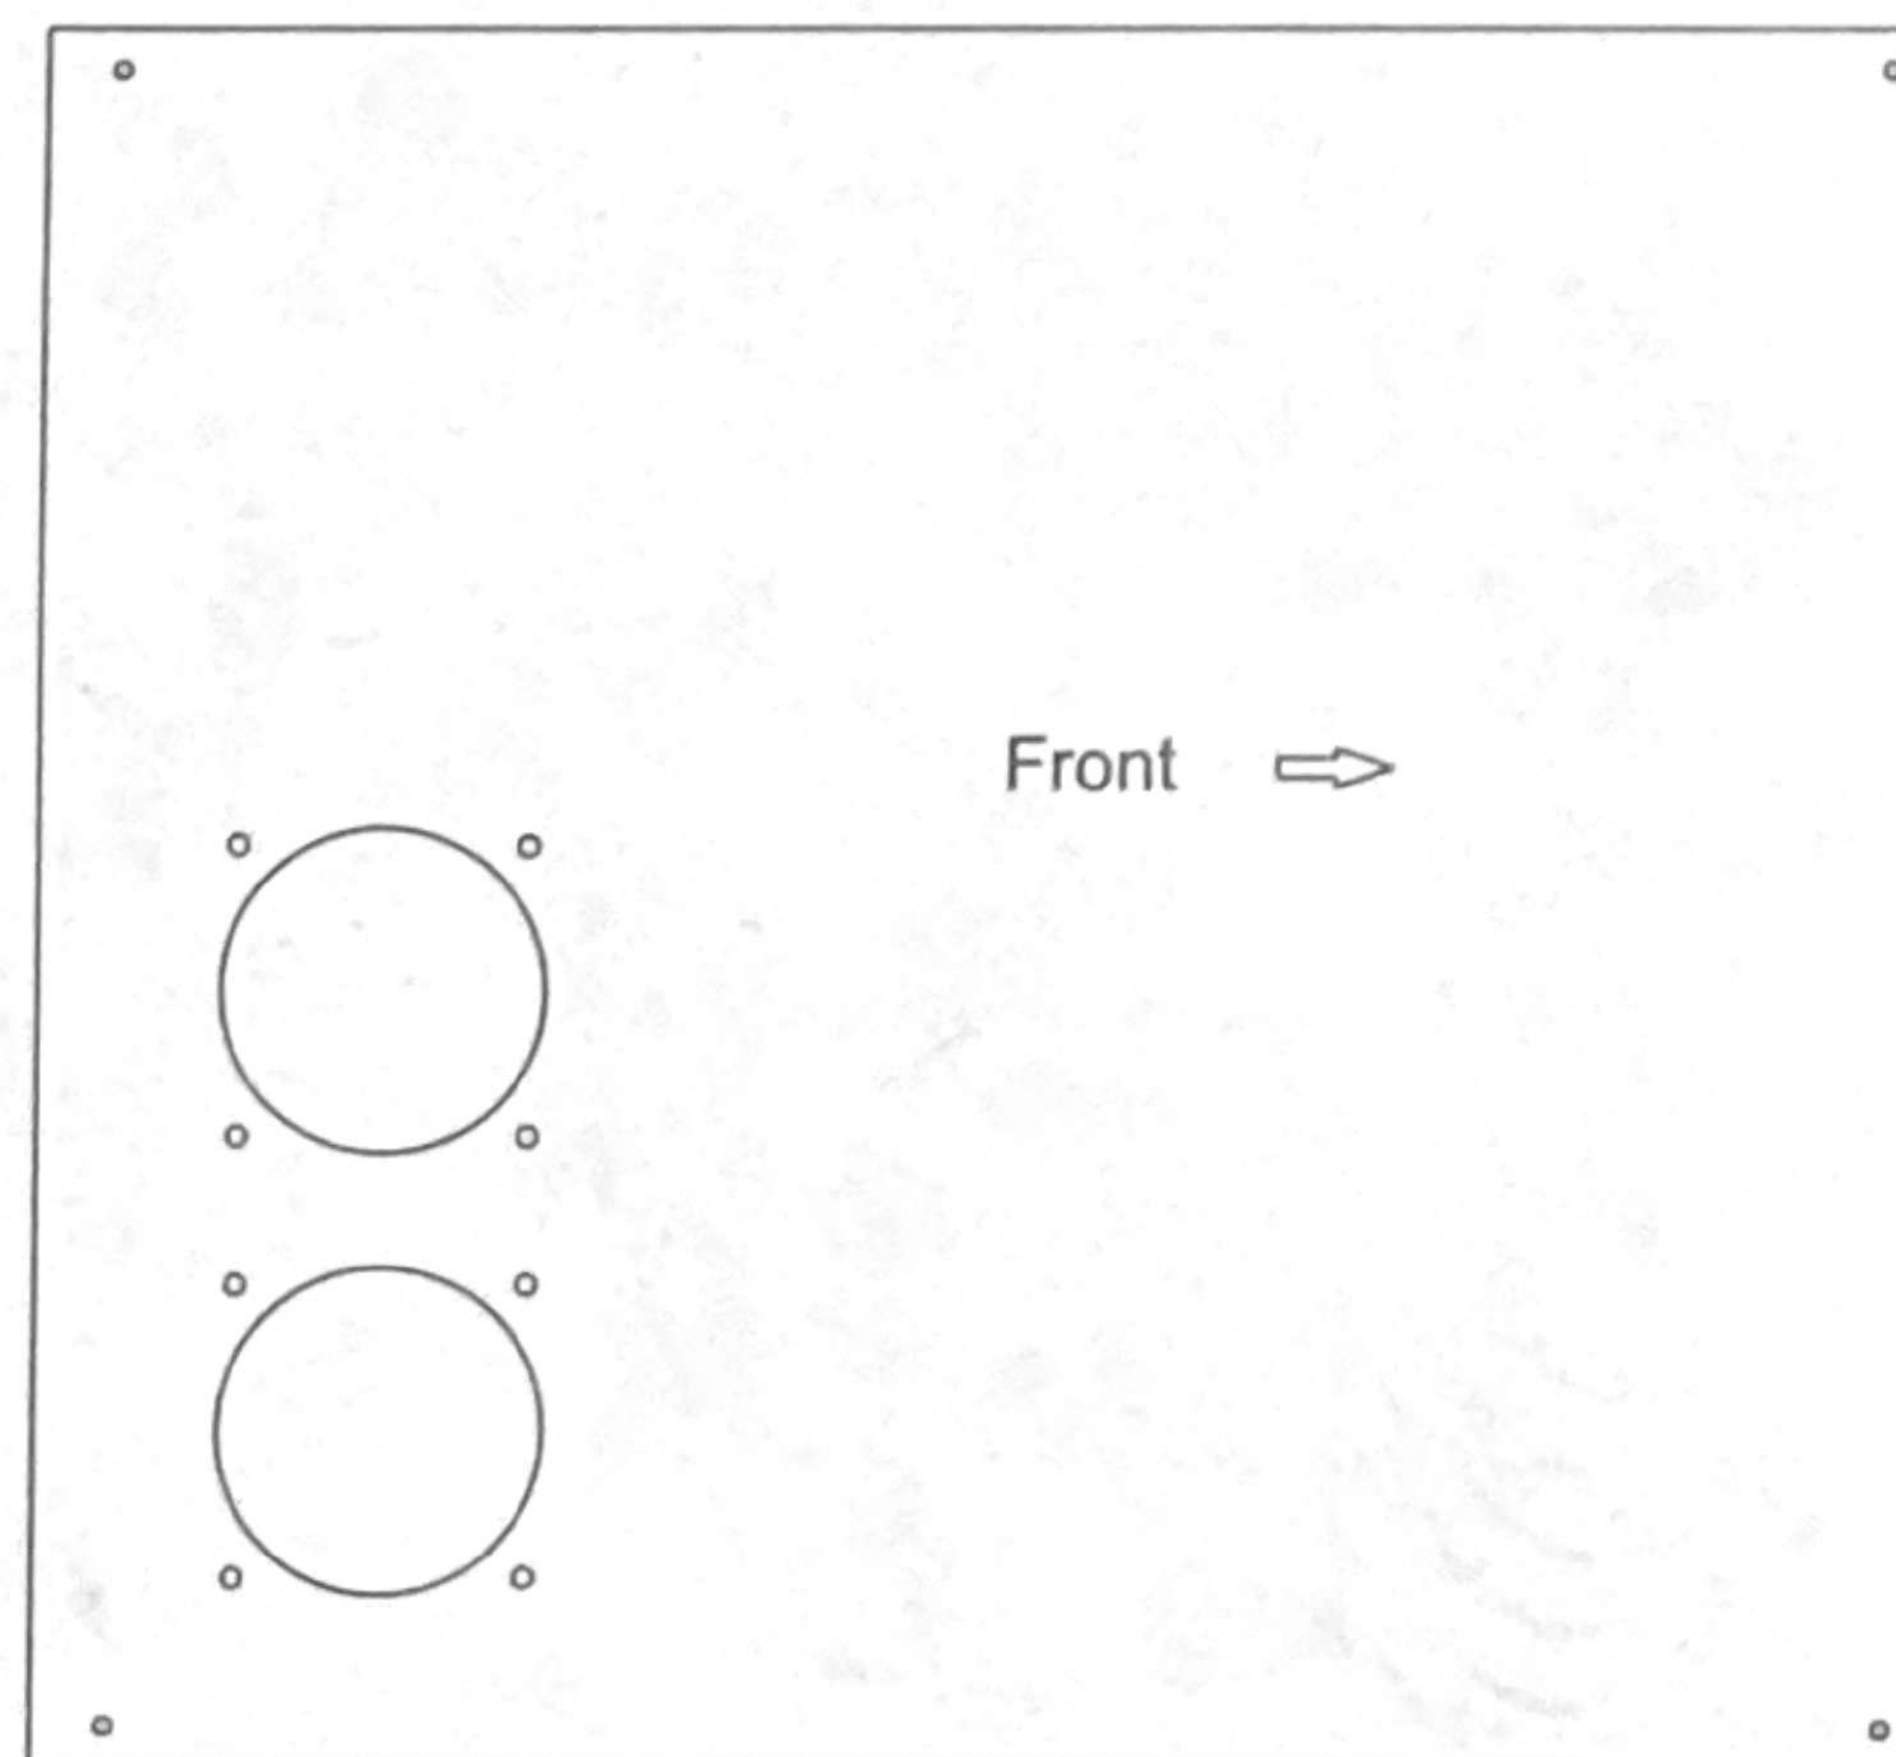


Right Panel
3013-AC-05

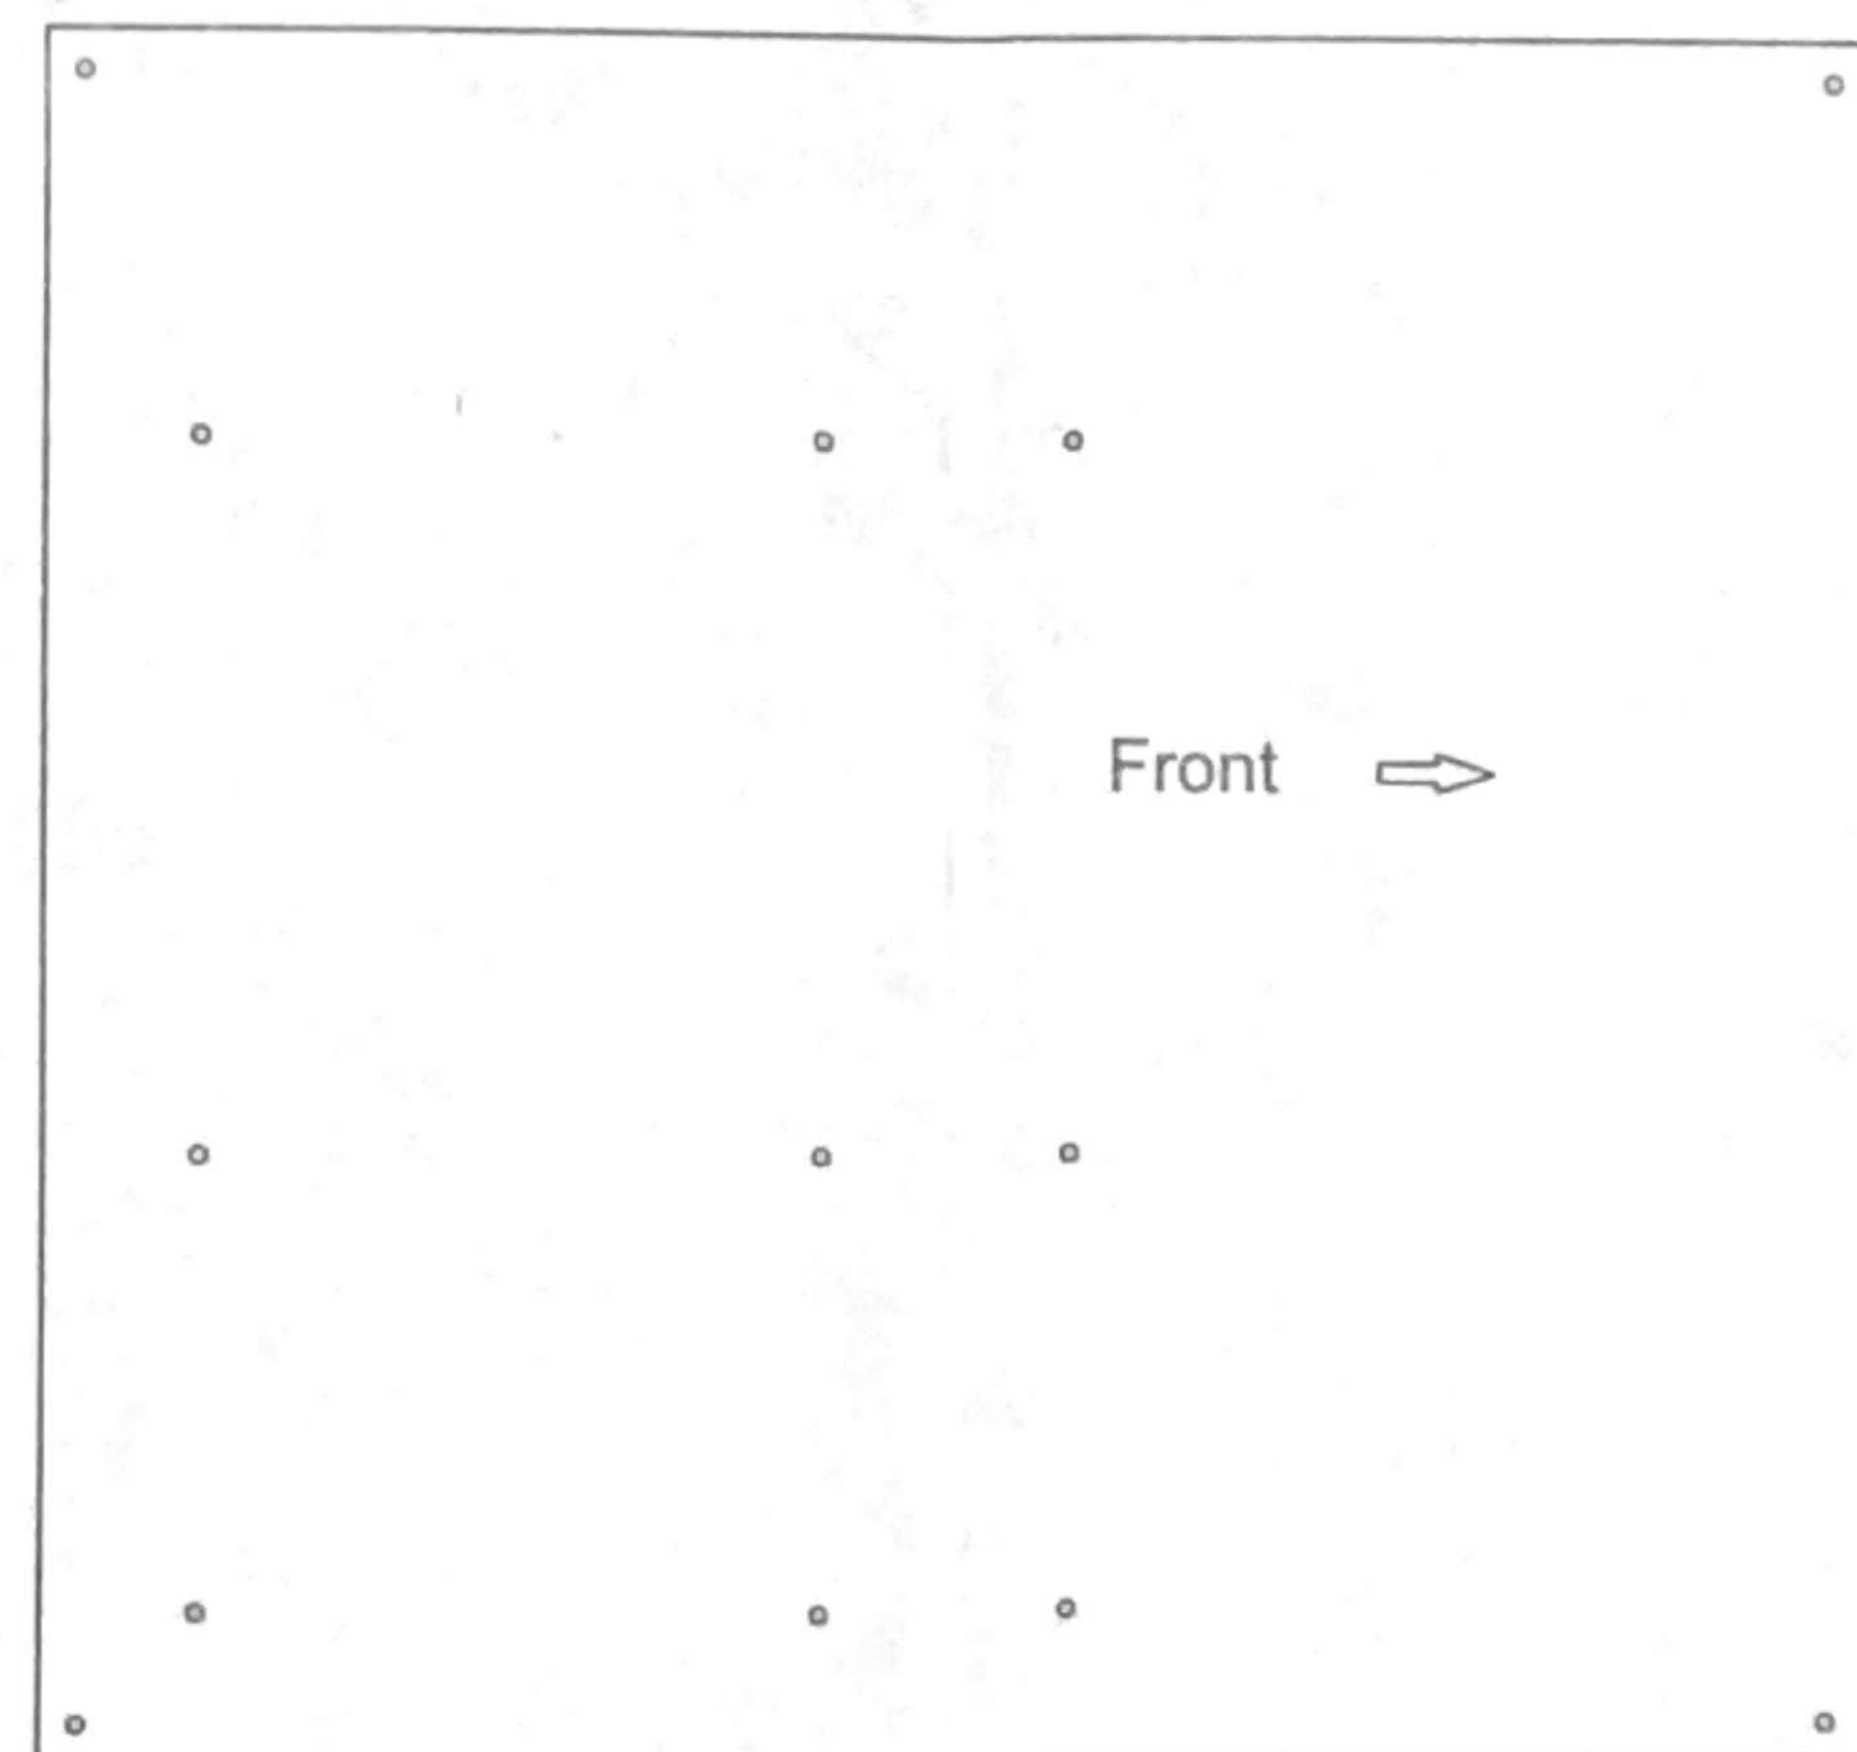


Left Panel
3013-AC-06

Front →

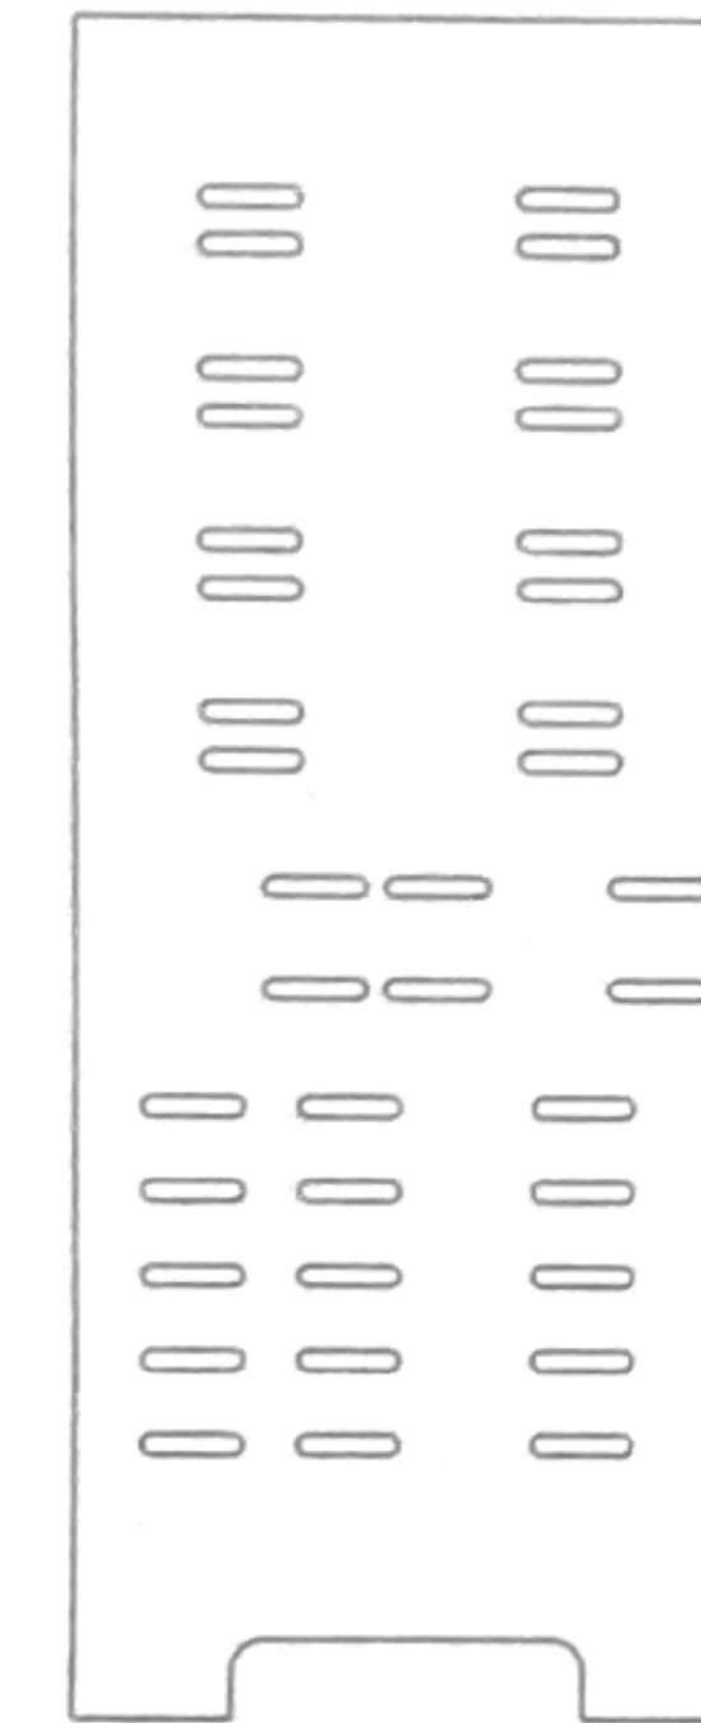


Interior
3013-AC-07


Front →

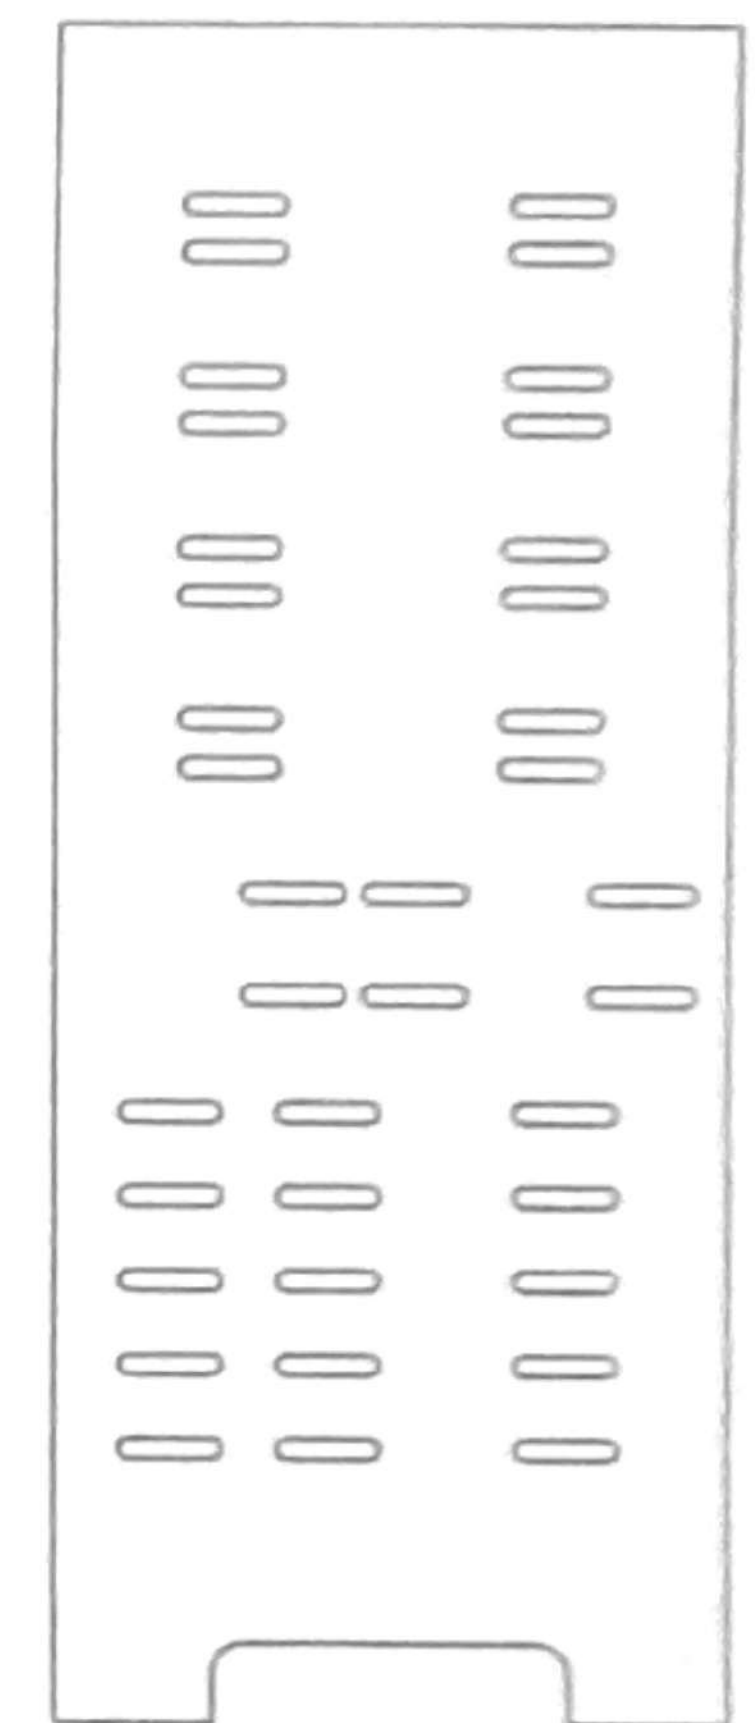

Interior
3013-AC-07

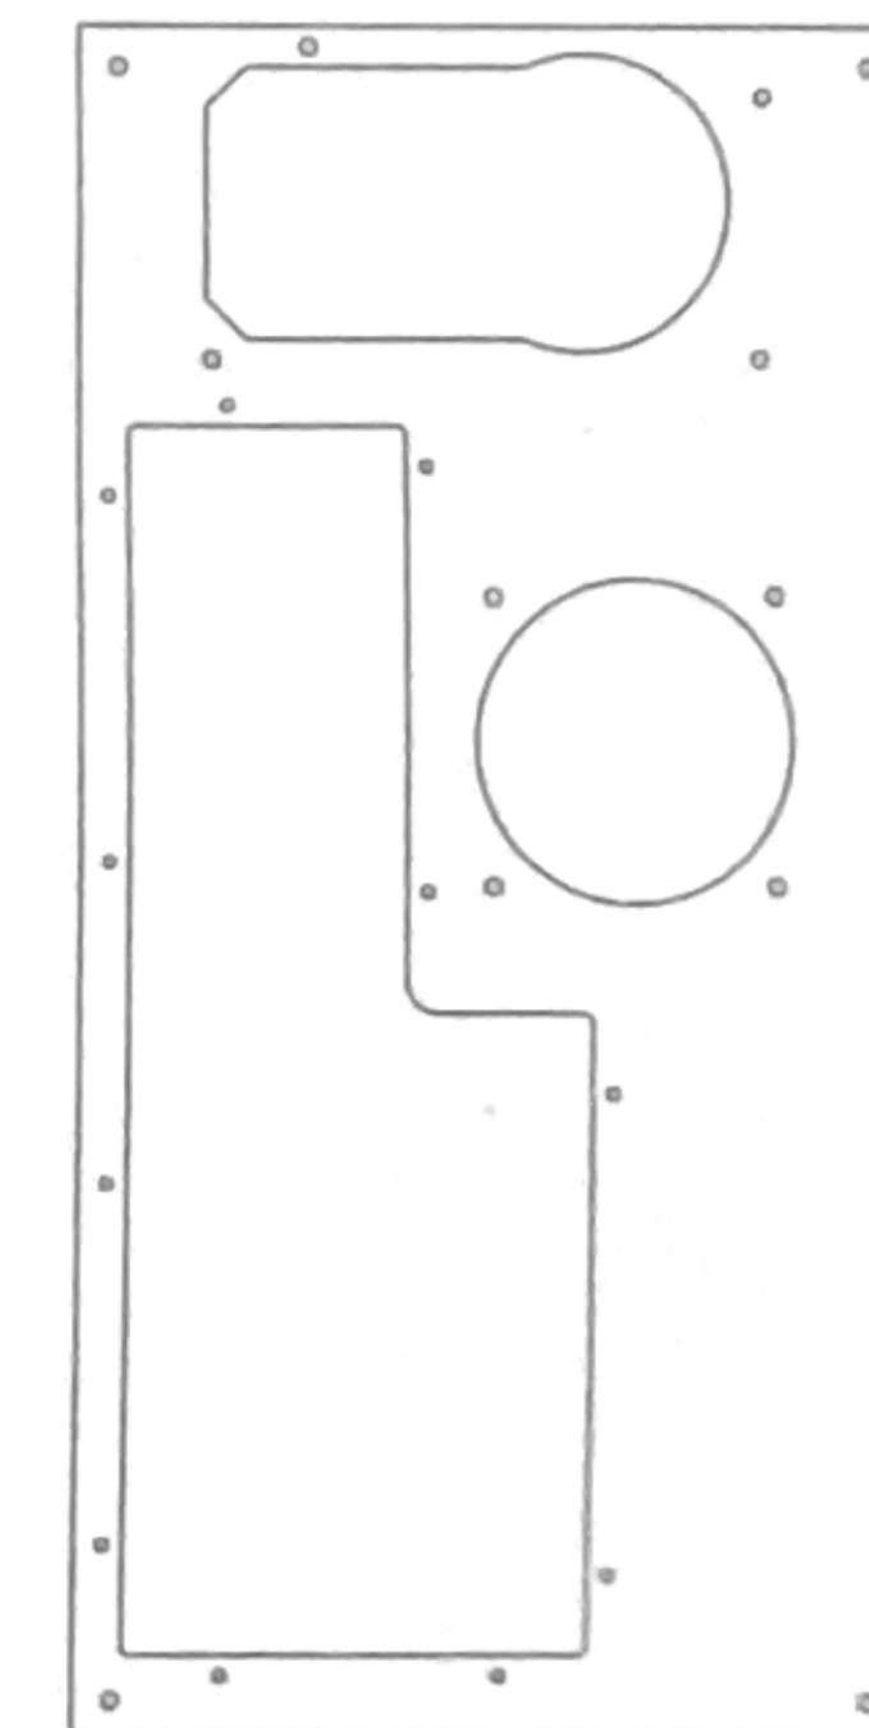


Back
3013-AC-02

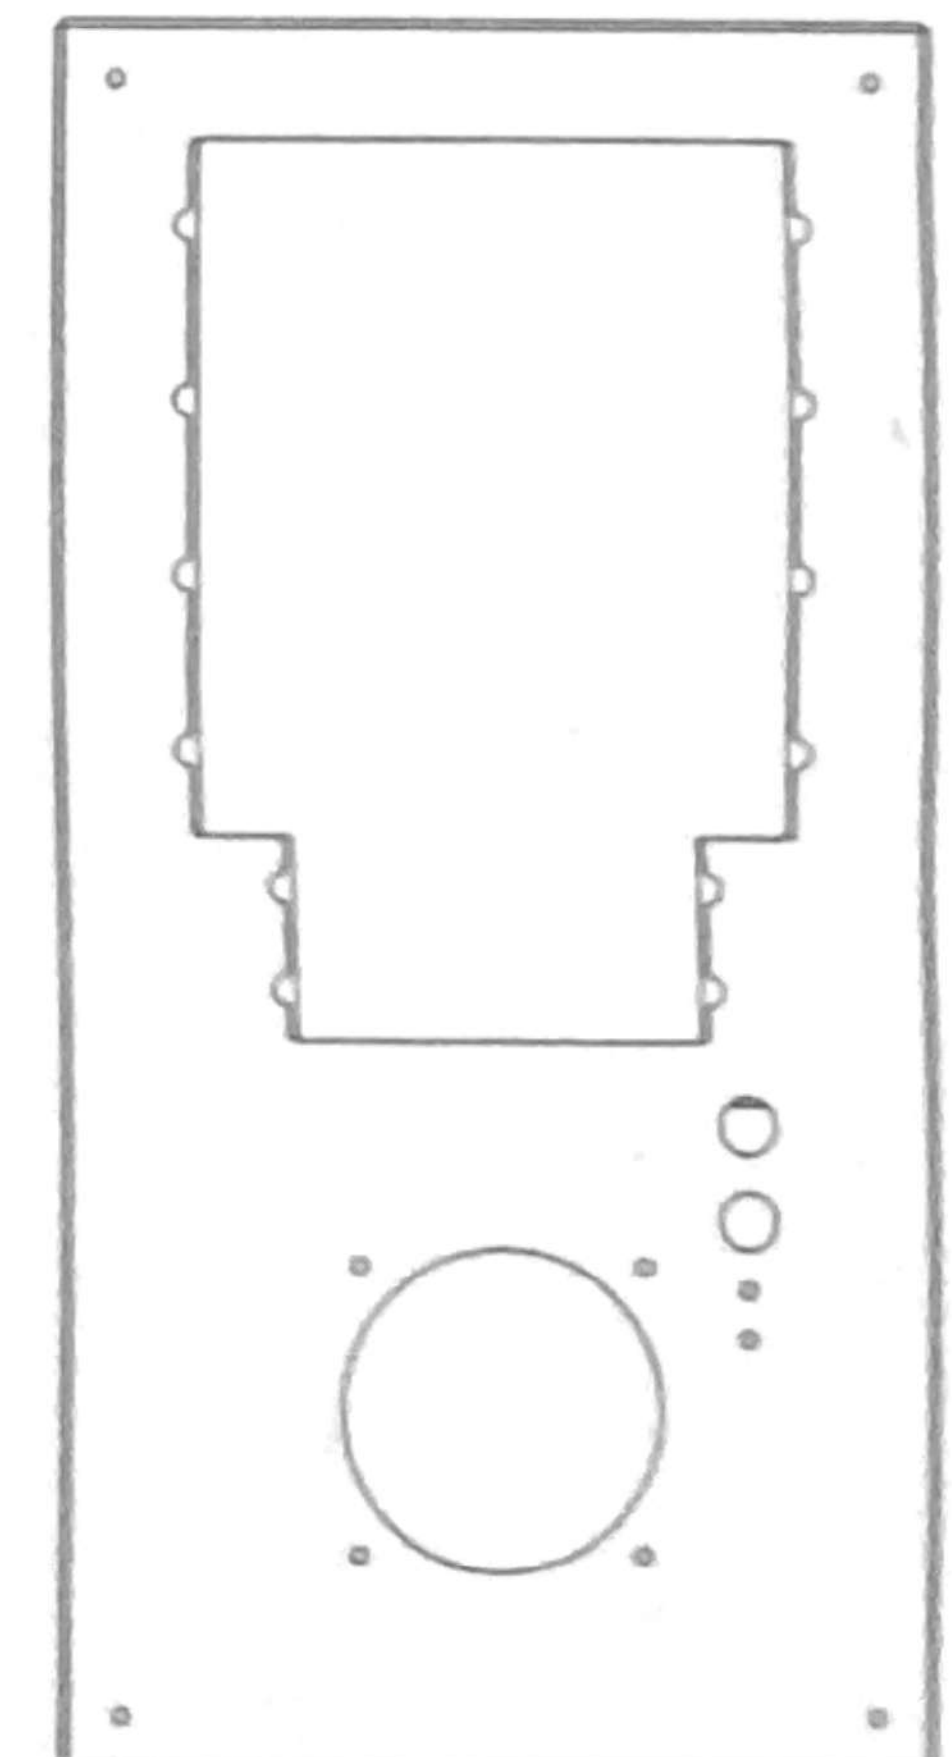


Front
3013-AC-01


Acrylic Case Hardware Parts List

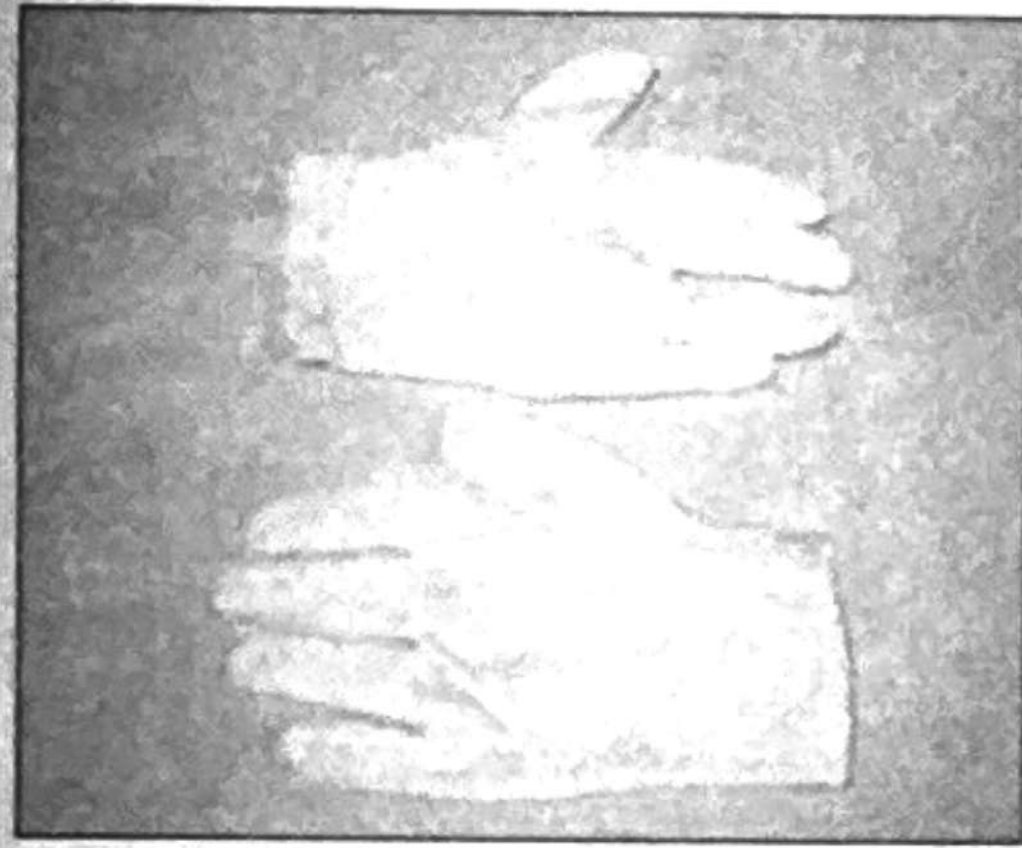


2-Contton gloves
2X7017-AC-01

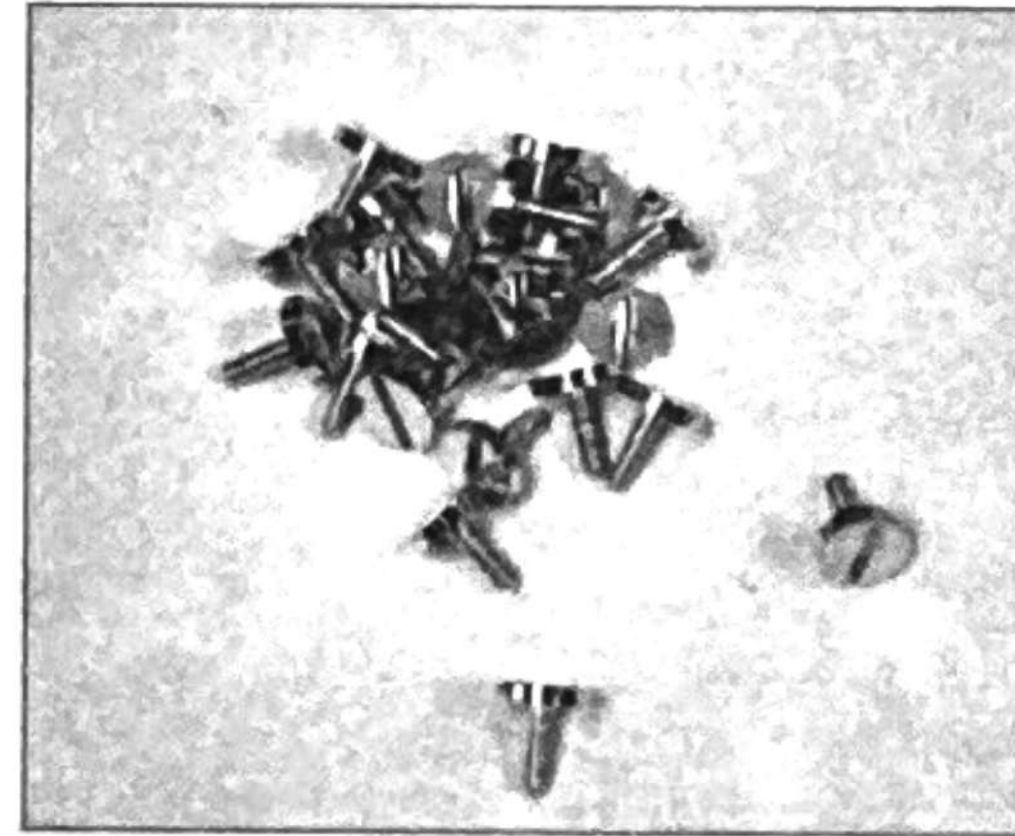


24-5.0mm Panel
24X5003-AC-02

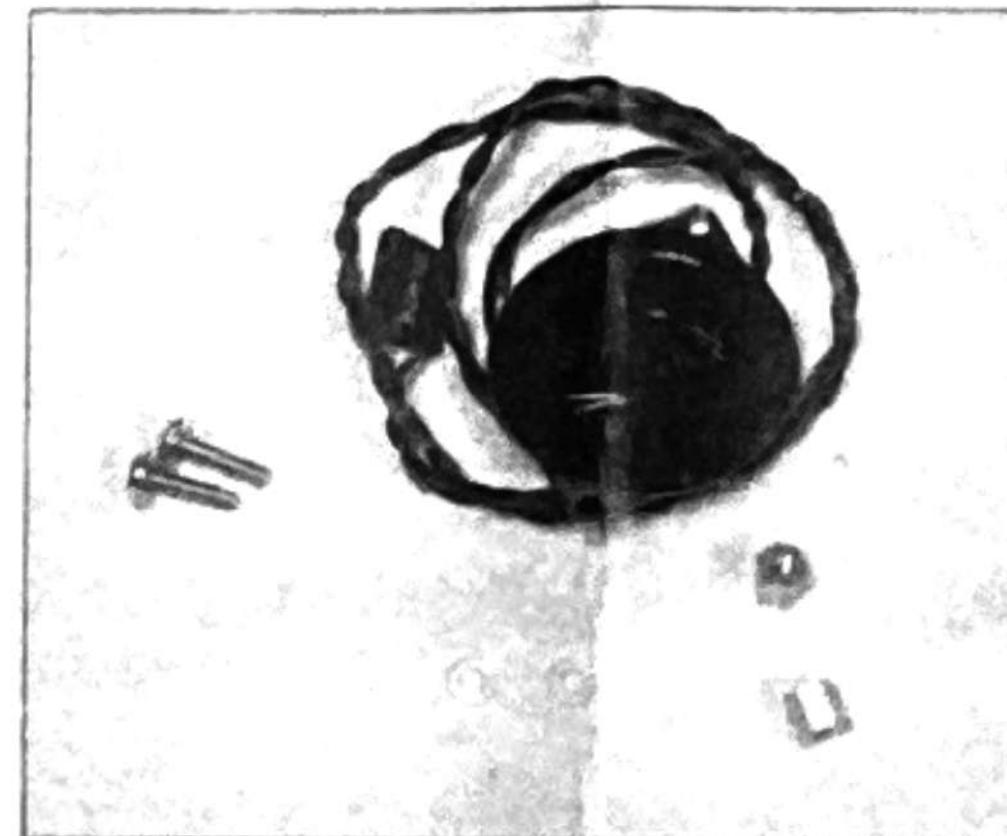


1-Speaker assembly and screws
2X5003-AC-04&1X2013-AC-01

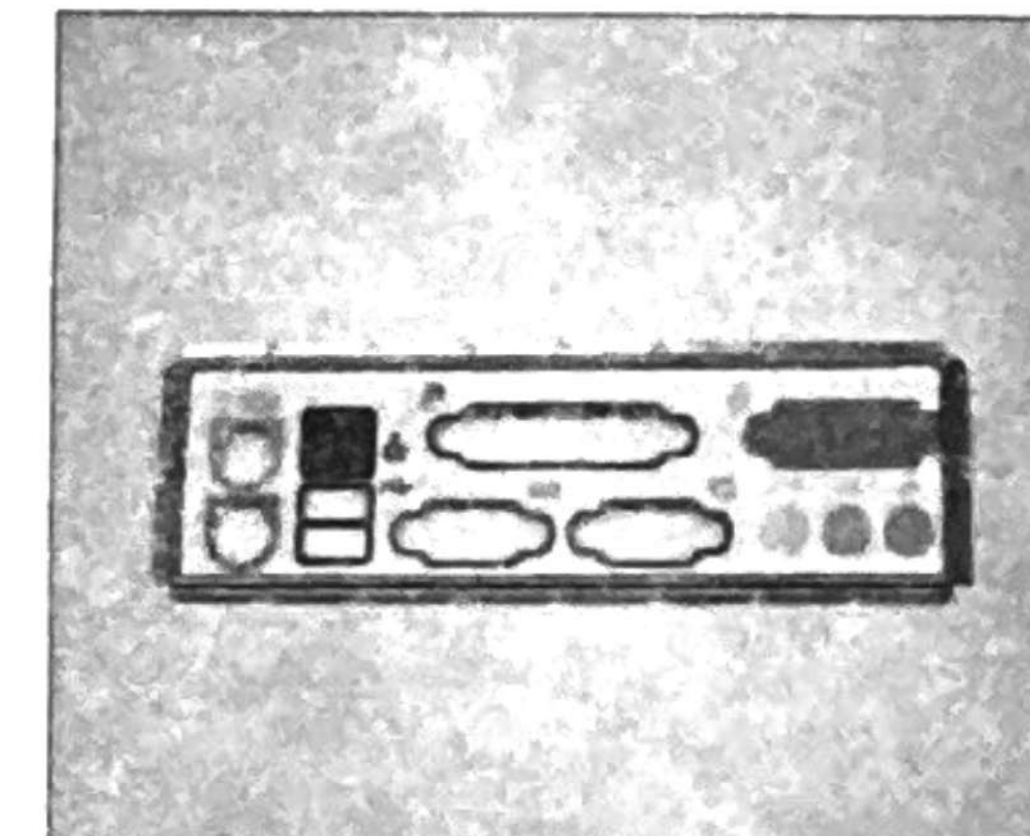


1-1/0 shield plate
1X5038-AC-01

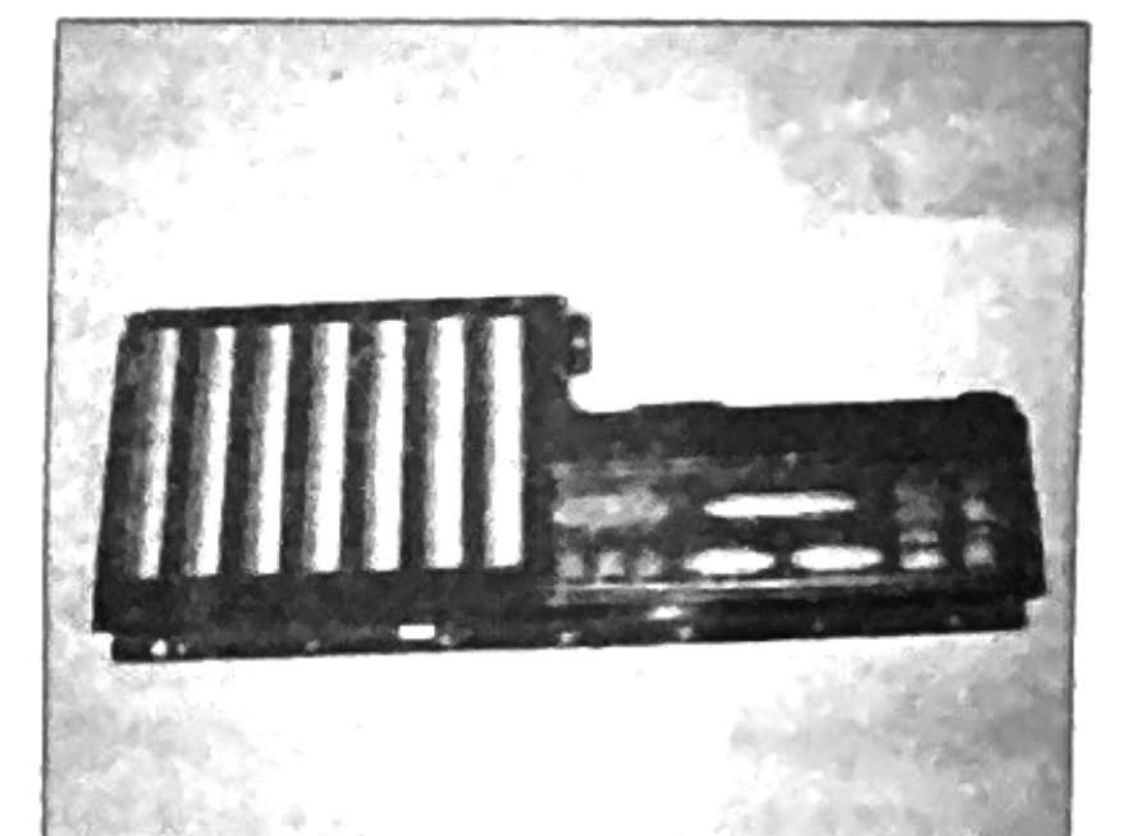


1-Aluminum backplate pre-installed
1X7019-AC-01

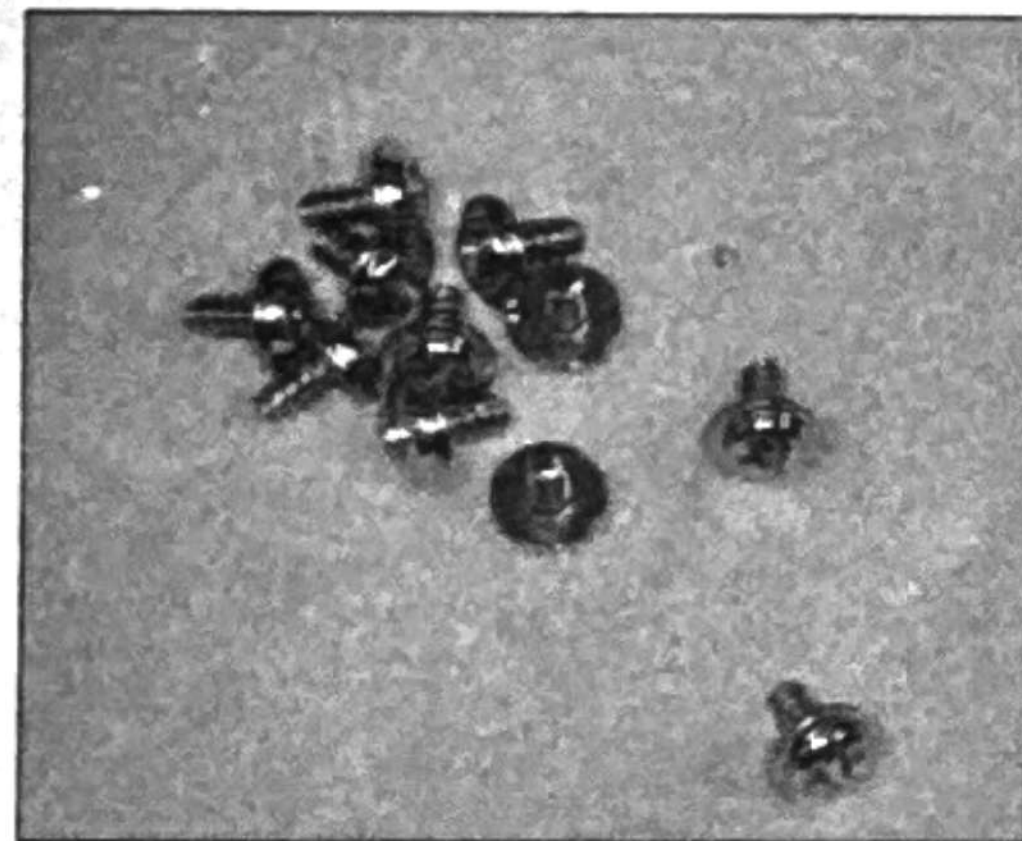


11-Backplate screws
11X5002-AC-18

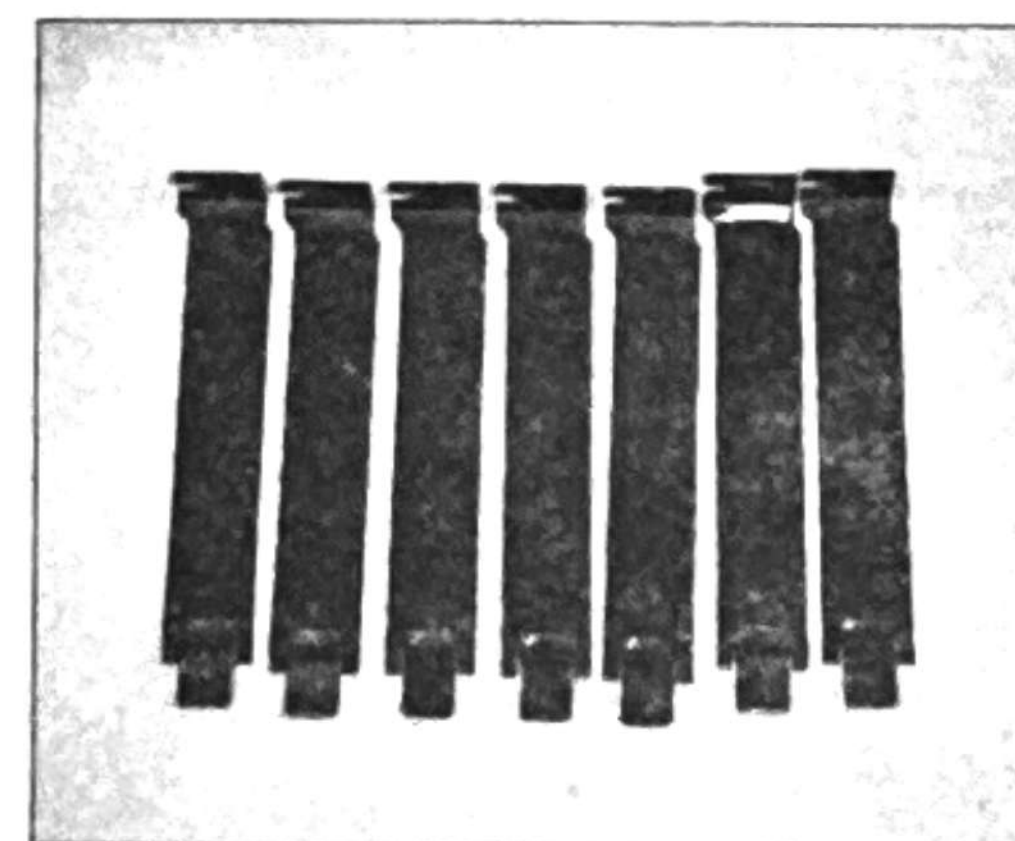


7-PCI slot plates
7X7018-AC-01

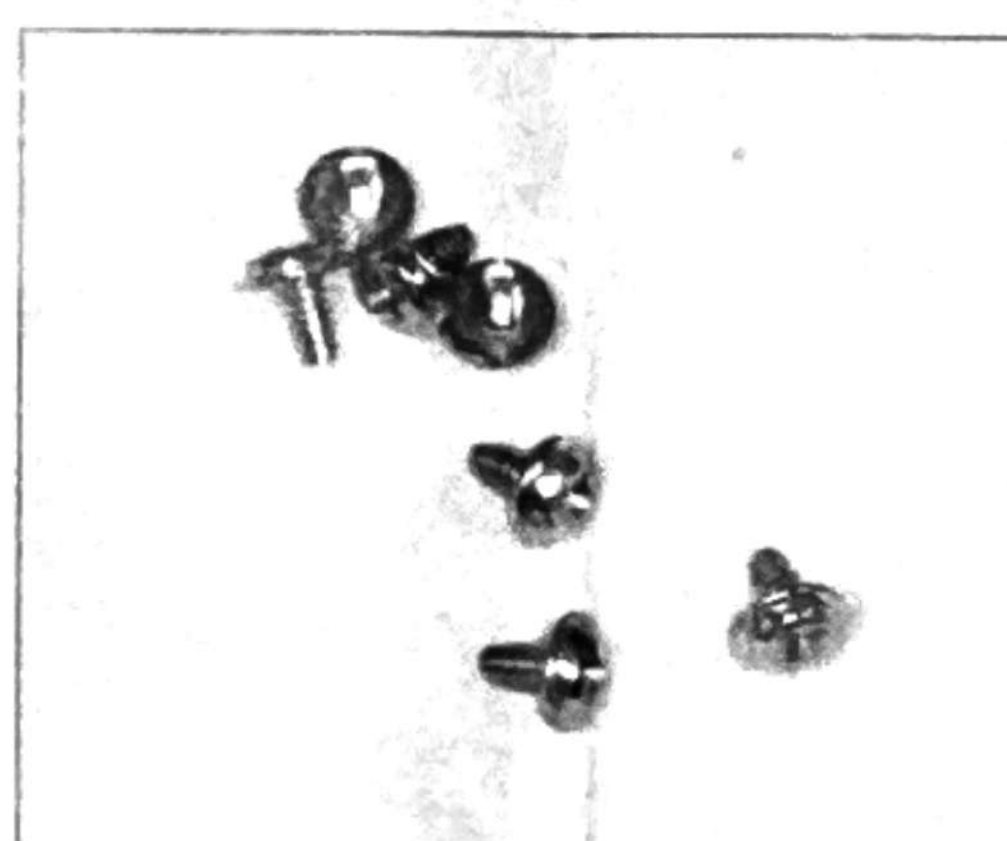


7-PCI Mount Screws
7X5002-AC-16

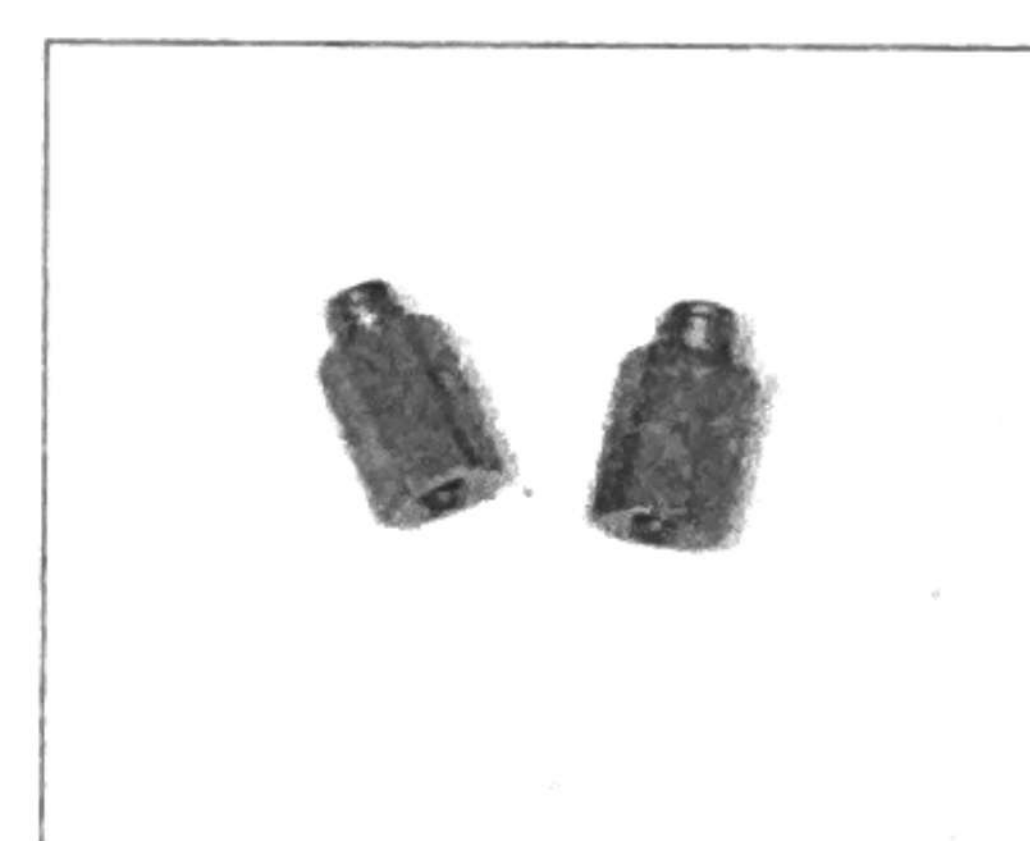


2-Switch PCB Standoffs
2X5005-AC-04

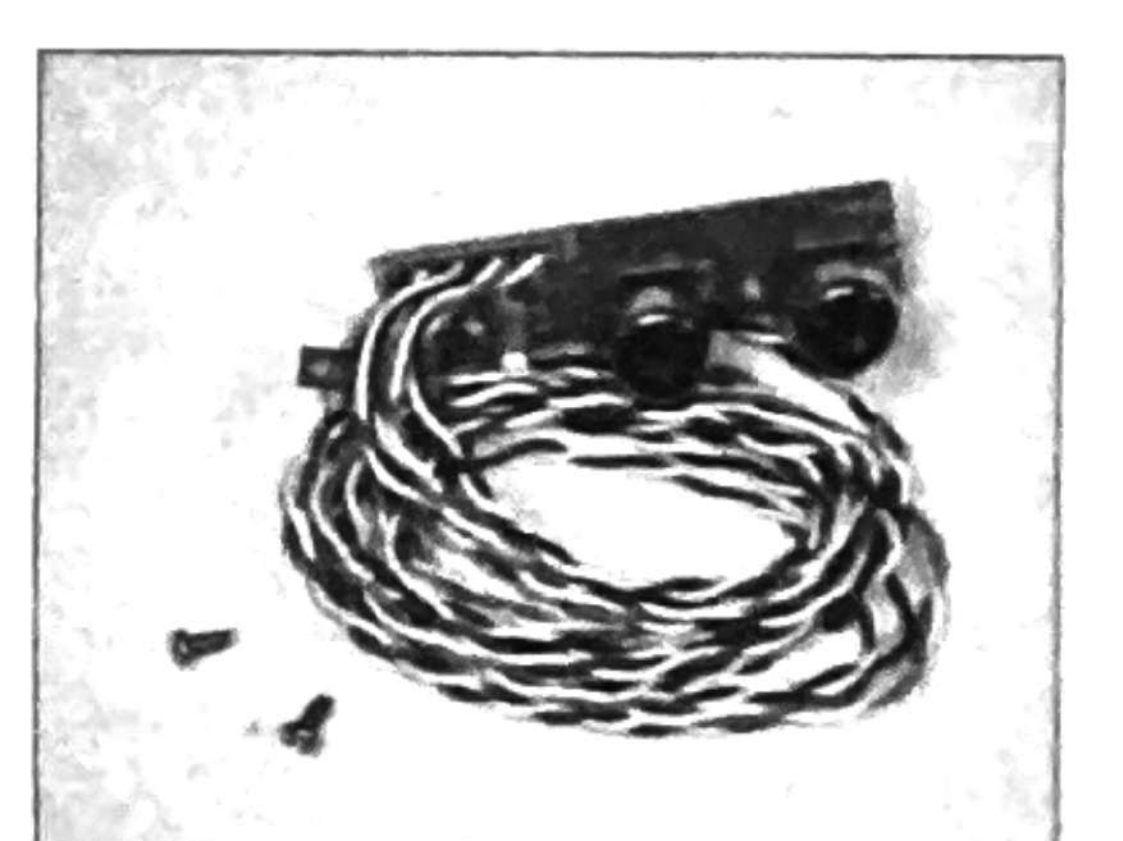


1-Switch and LED Assembly and Screws
2X5003-AC-15&1x2003-AC-05

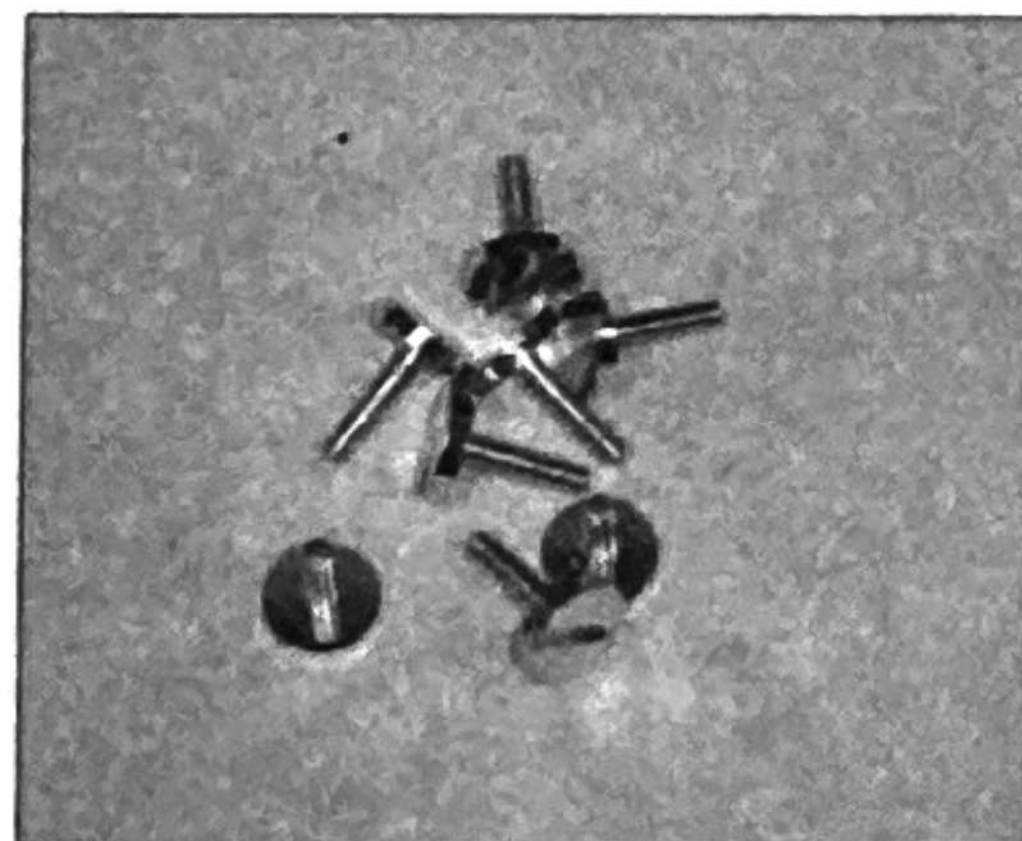


8-8.0mm Panel Screws(No.2)
8x5003-AC-01

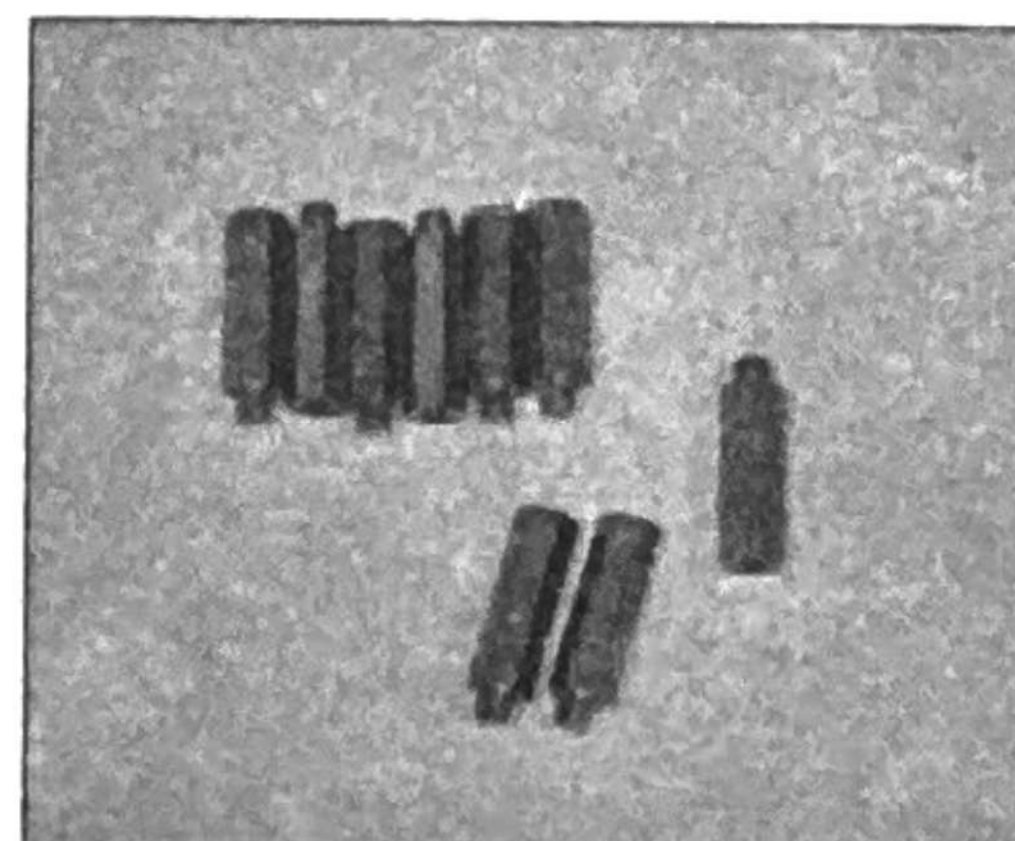


9-MB standoffs Course Threaded
9X5005-AC-03

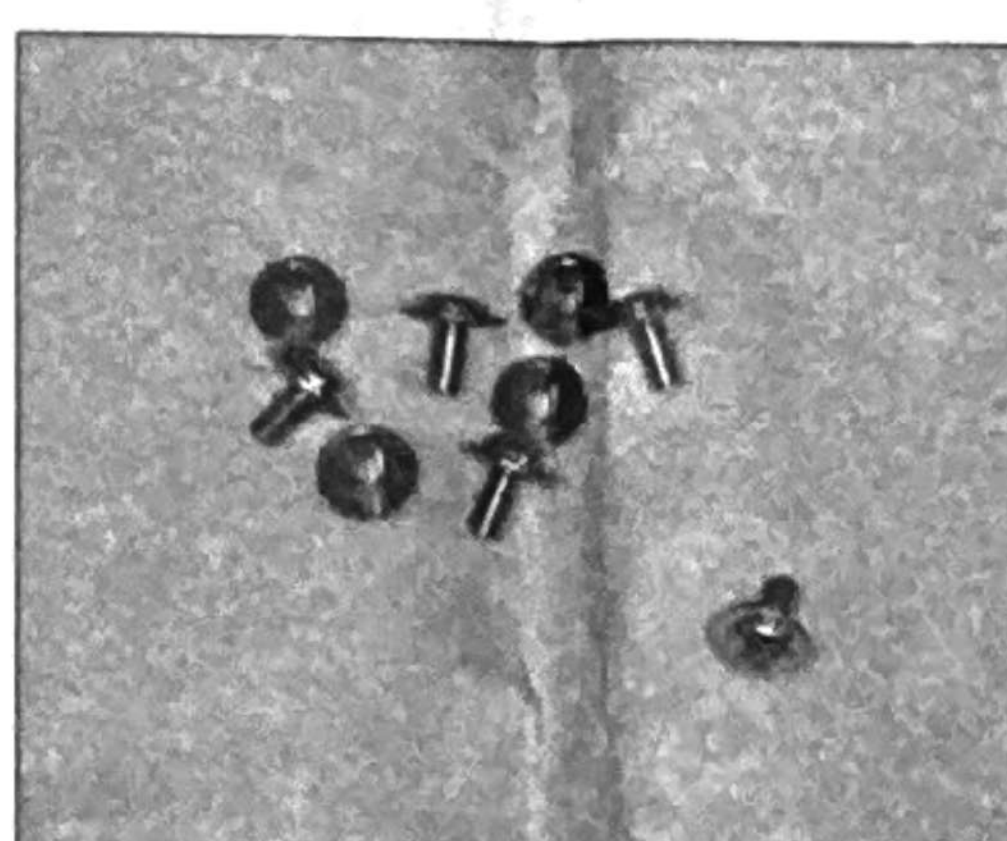

9-MB Mount Screws
9X5002-AC-17

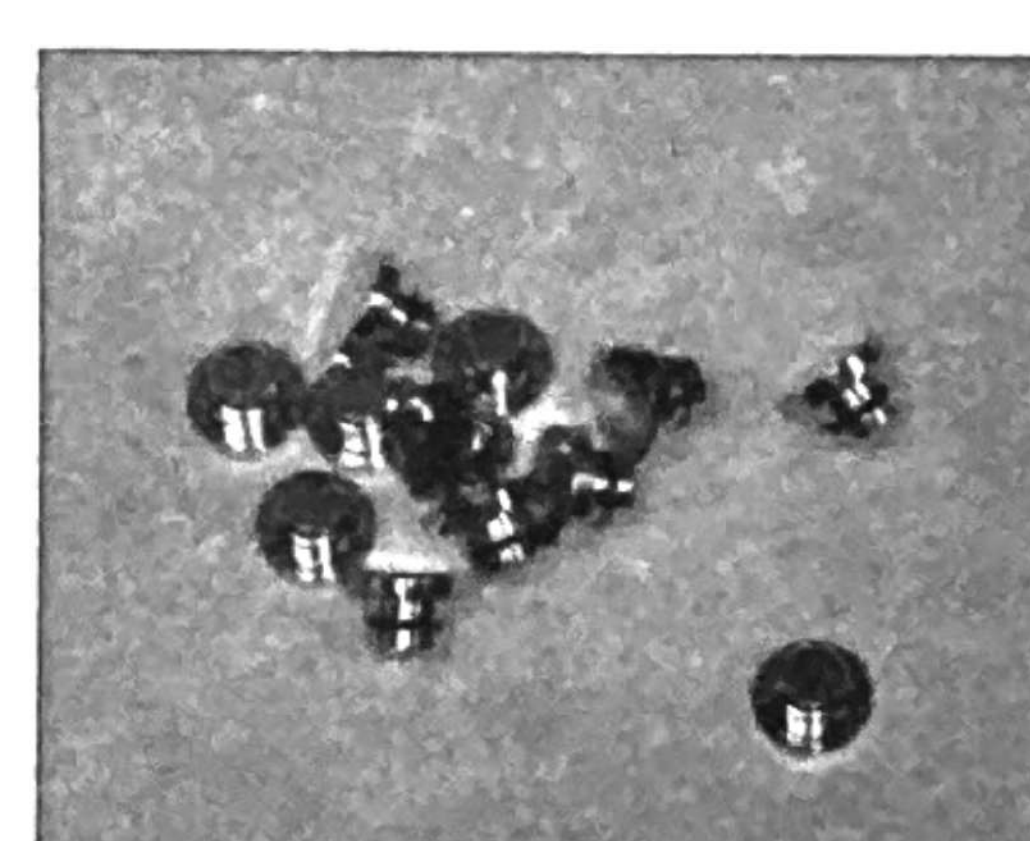

12-Face plate pins
12X5003-AC-03

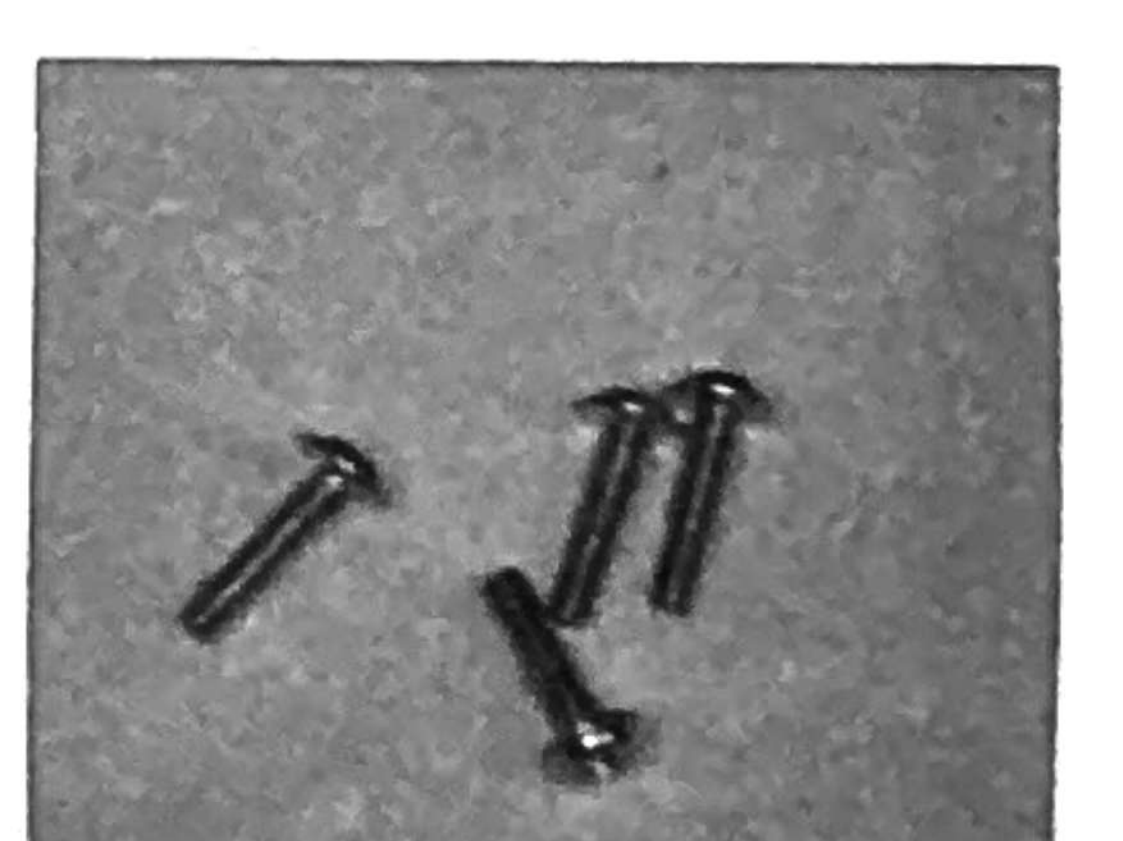

4-Long PSU Mount Screws
4x5002-AC-12




8-Long fan serews or Front & Back fans
8X5002-AC-13



12-short fan screws(For Top & Side fans)
12X5002-AC-14



20-HDD standoffs Course Threaded
20X5005-AC-01

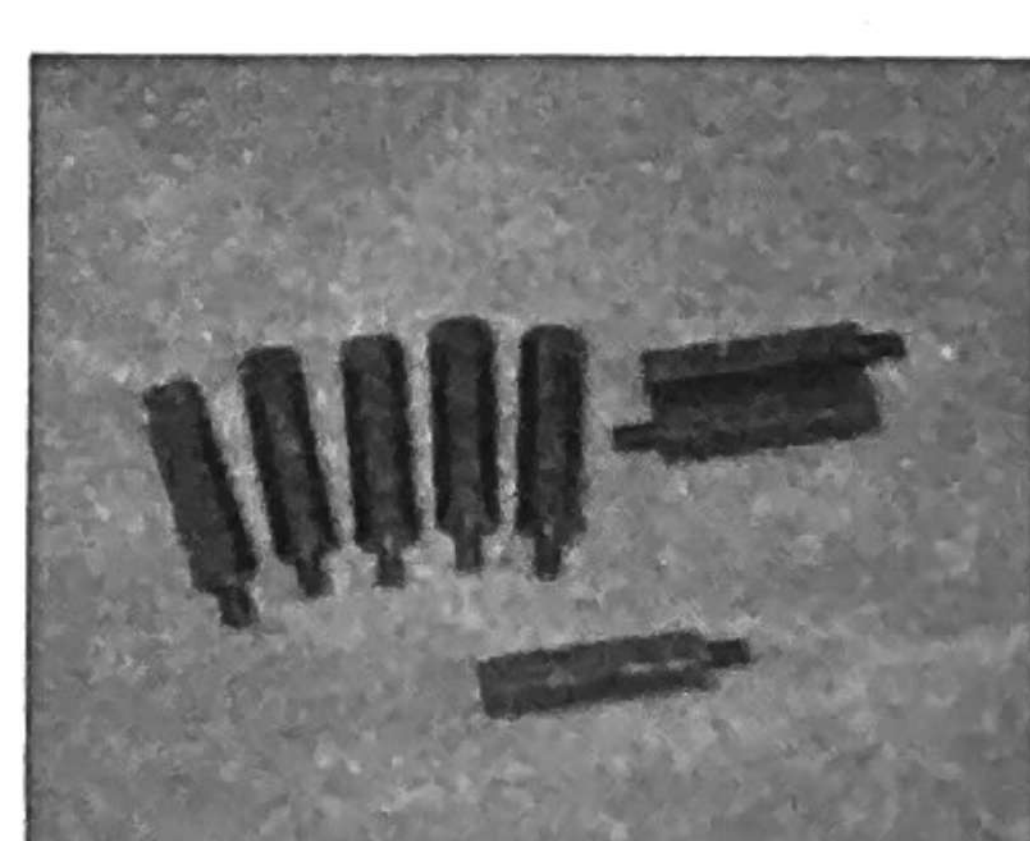

8-Floppy Drive Standoffs Fine Threaded
8X5005-AC-02




44-Drive Mount Screws
44x5002-AC-11

Assembly Diagram

1

Pick up 8 PCS 5.0mm 5003-AC-02 to assemble 4x3014-AC-01 on 3013-AC-03 and 4x3014-AC-01 on 3013-AC-04. Note: every 3014-AC-01 has 3 screws, leave other 2 screws for assembling other panels.

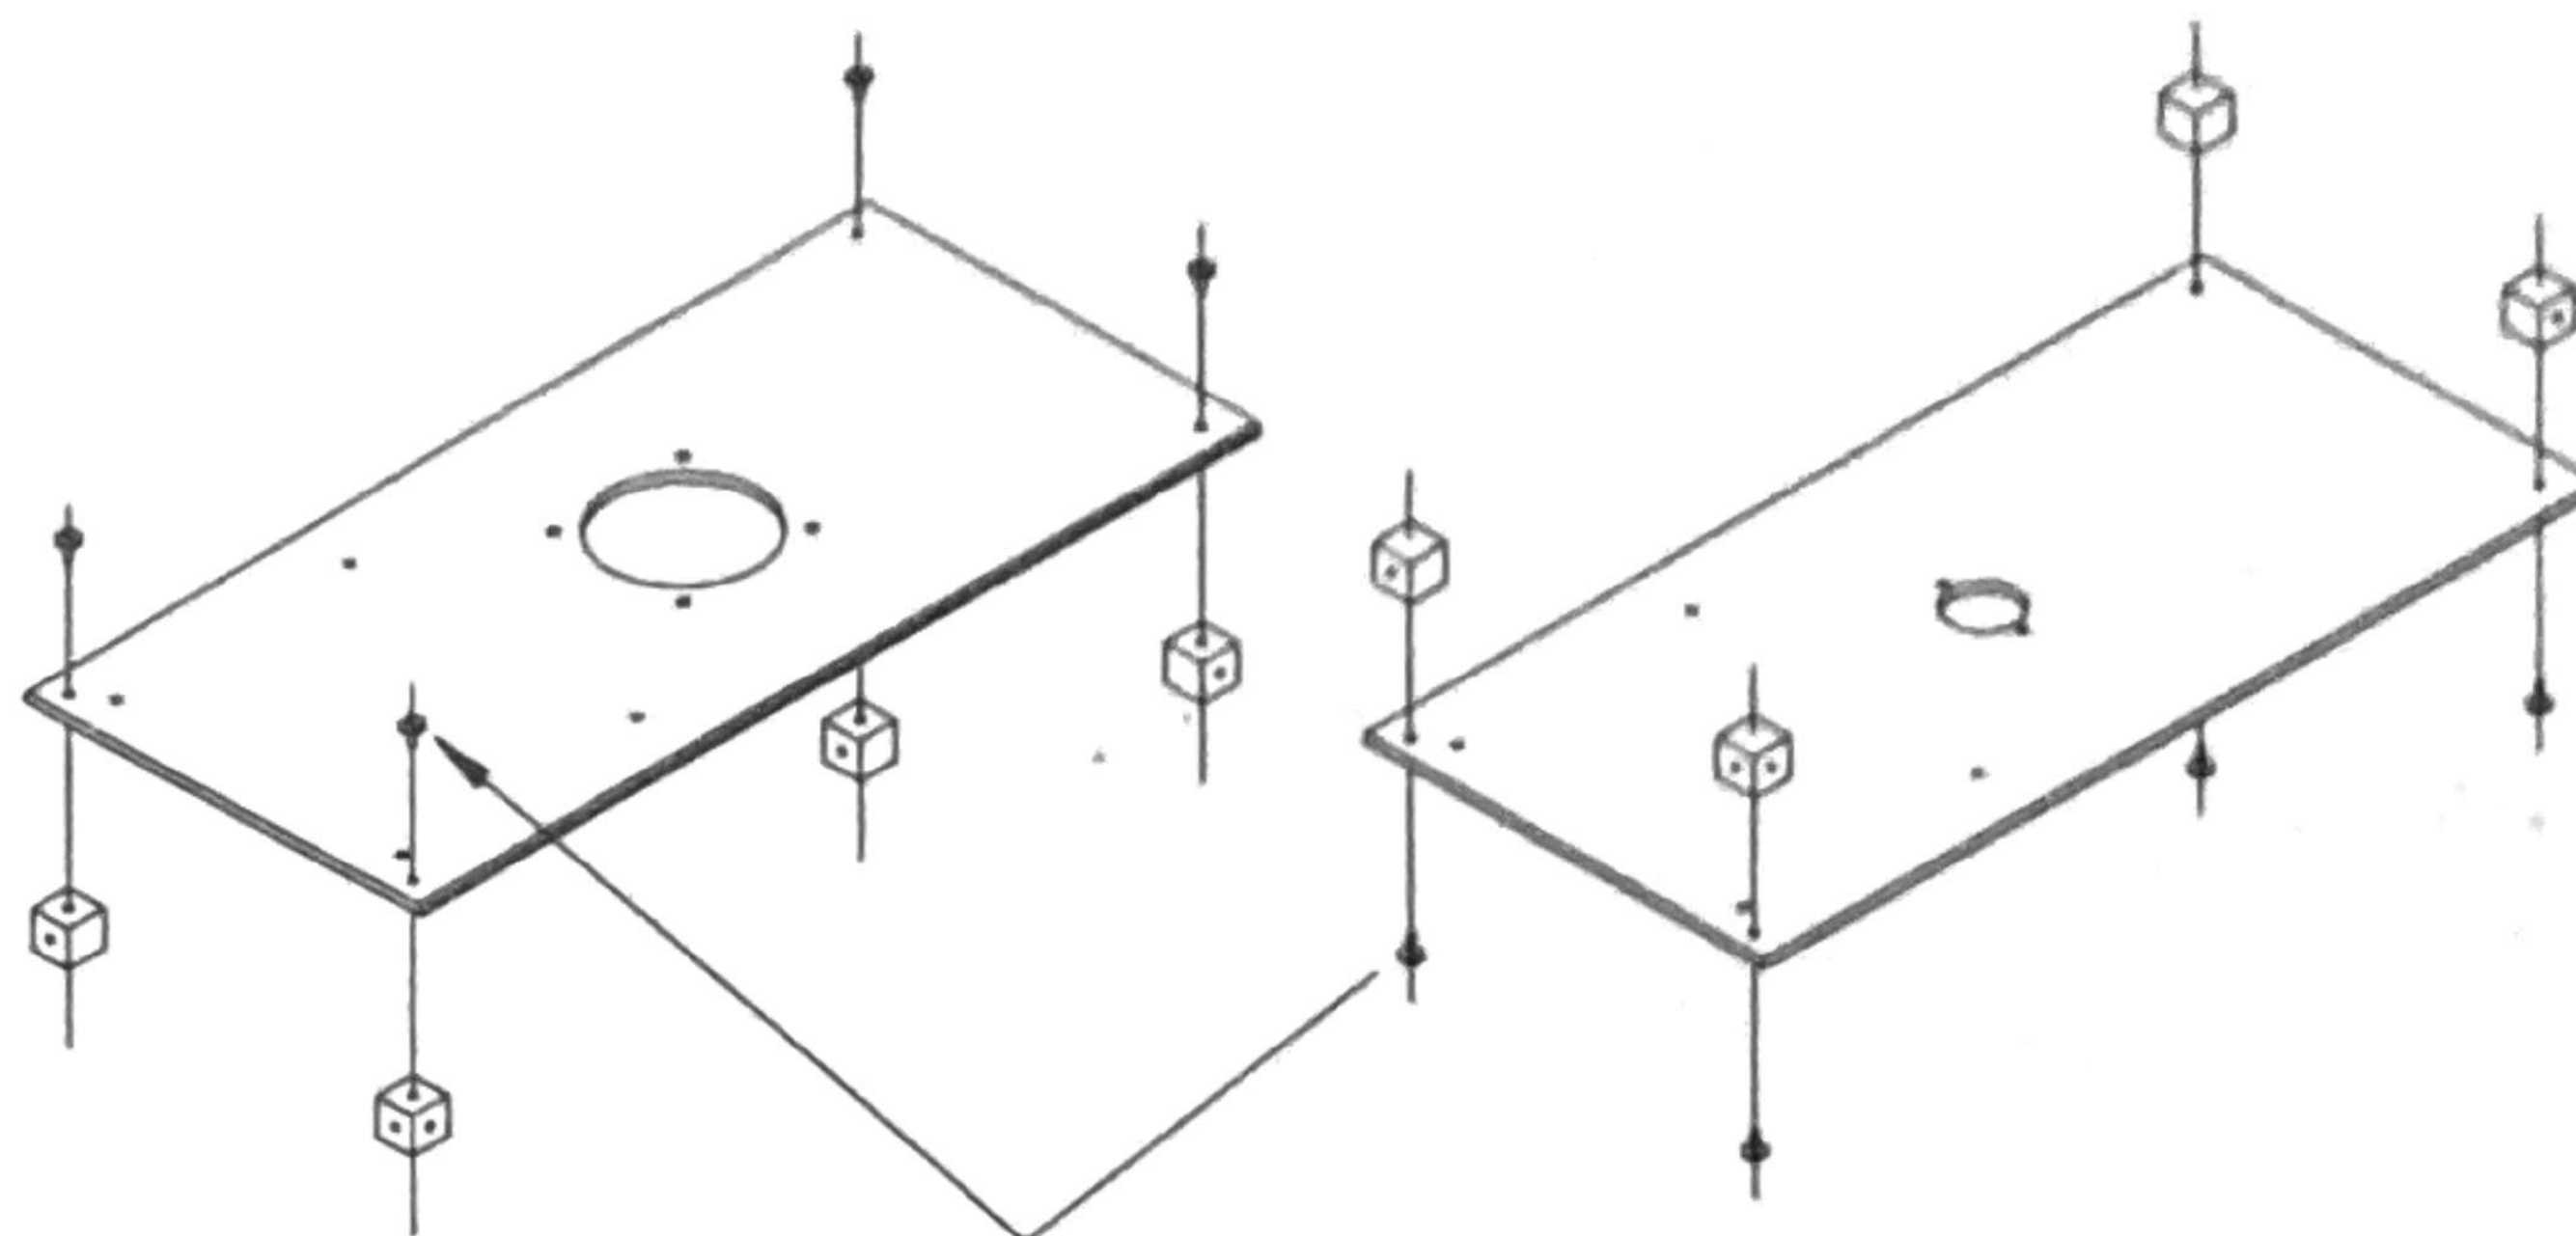


5003-AC-02 for 5mm panel

2

Pick up 8pcs 5.0mm 5003-AC-02 to assemble 2x3013-AC-07 onto 3013-AC-03 and 3013-AC-04, pay attention to 3013-AC-07 direction. Then pick up 5003-AC-04 and 2013-AC-01 bag to install 2013-AC-01, following the assembly sequence of screw, bottom panel, plastic washer, speaker and nut


5003-AC-02
for 5mm panel

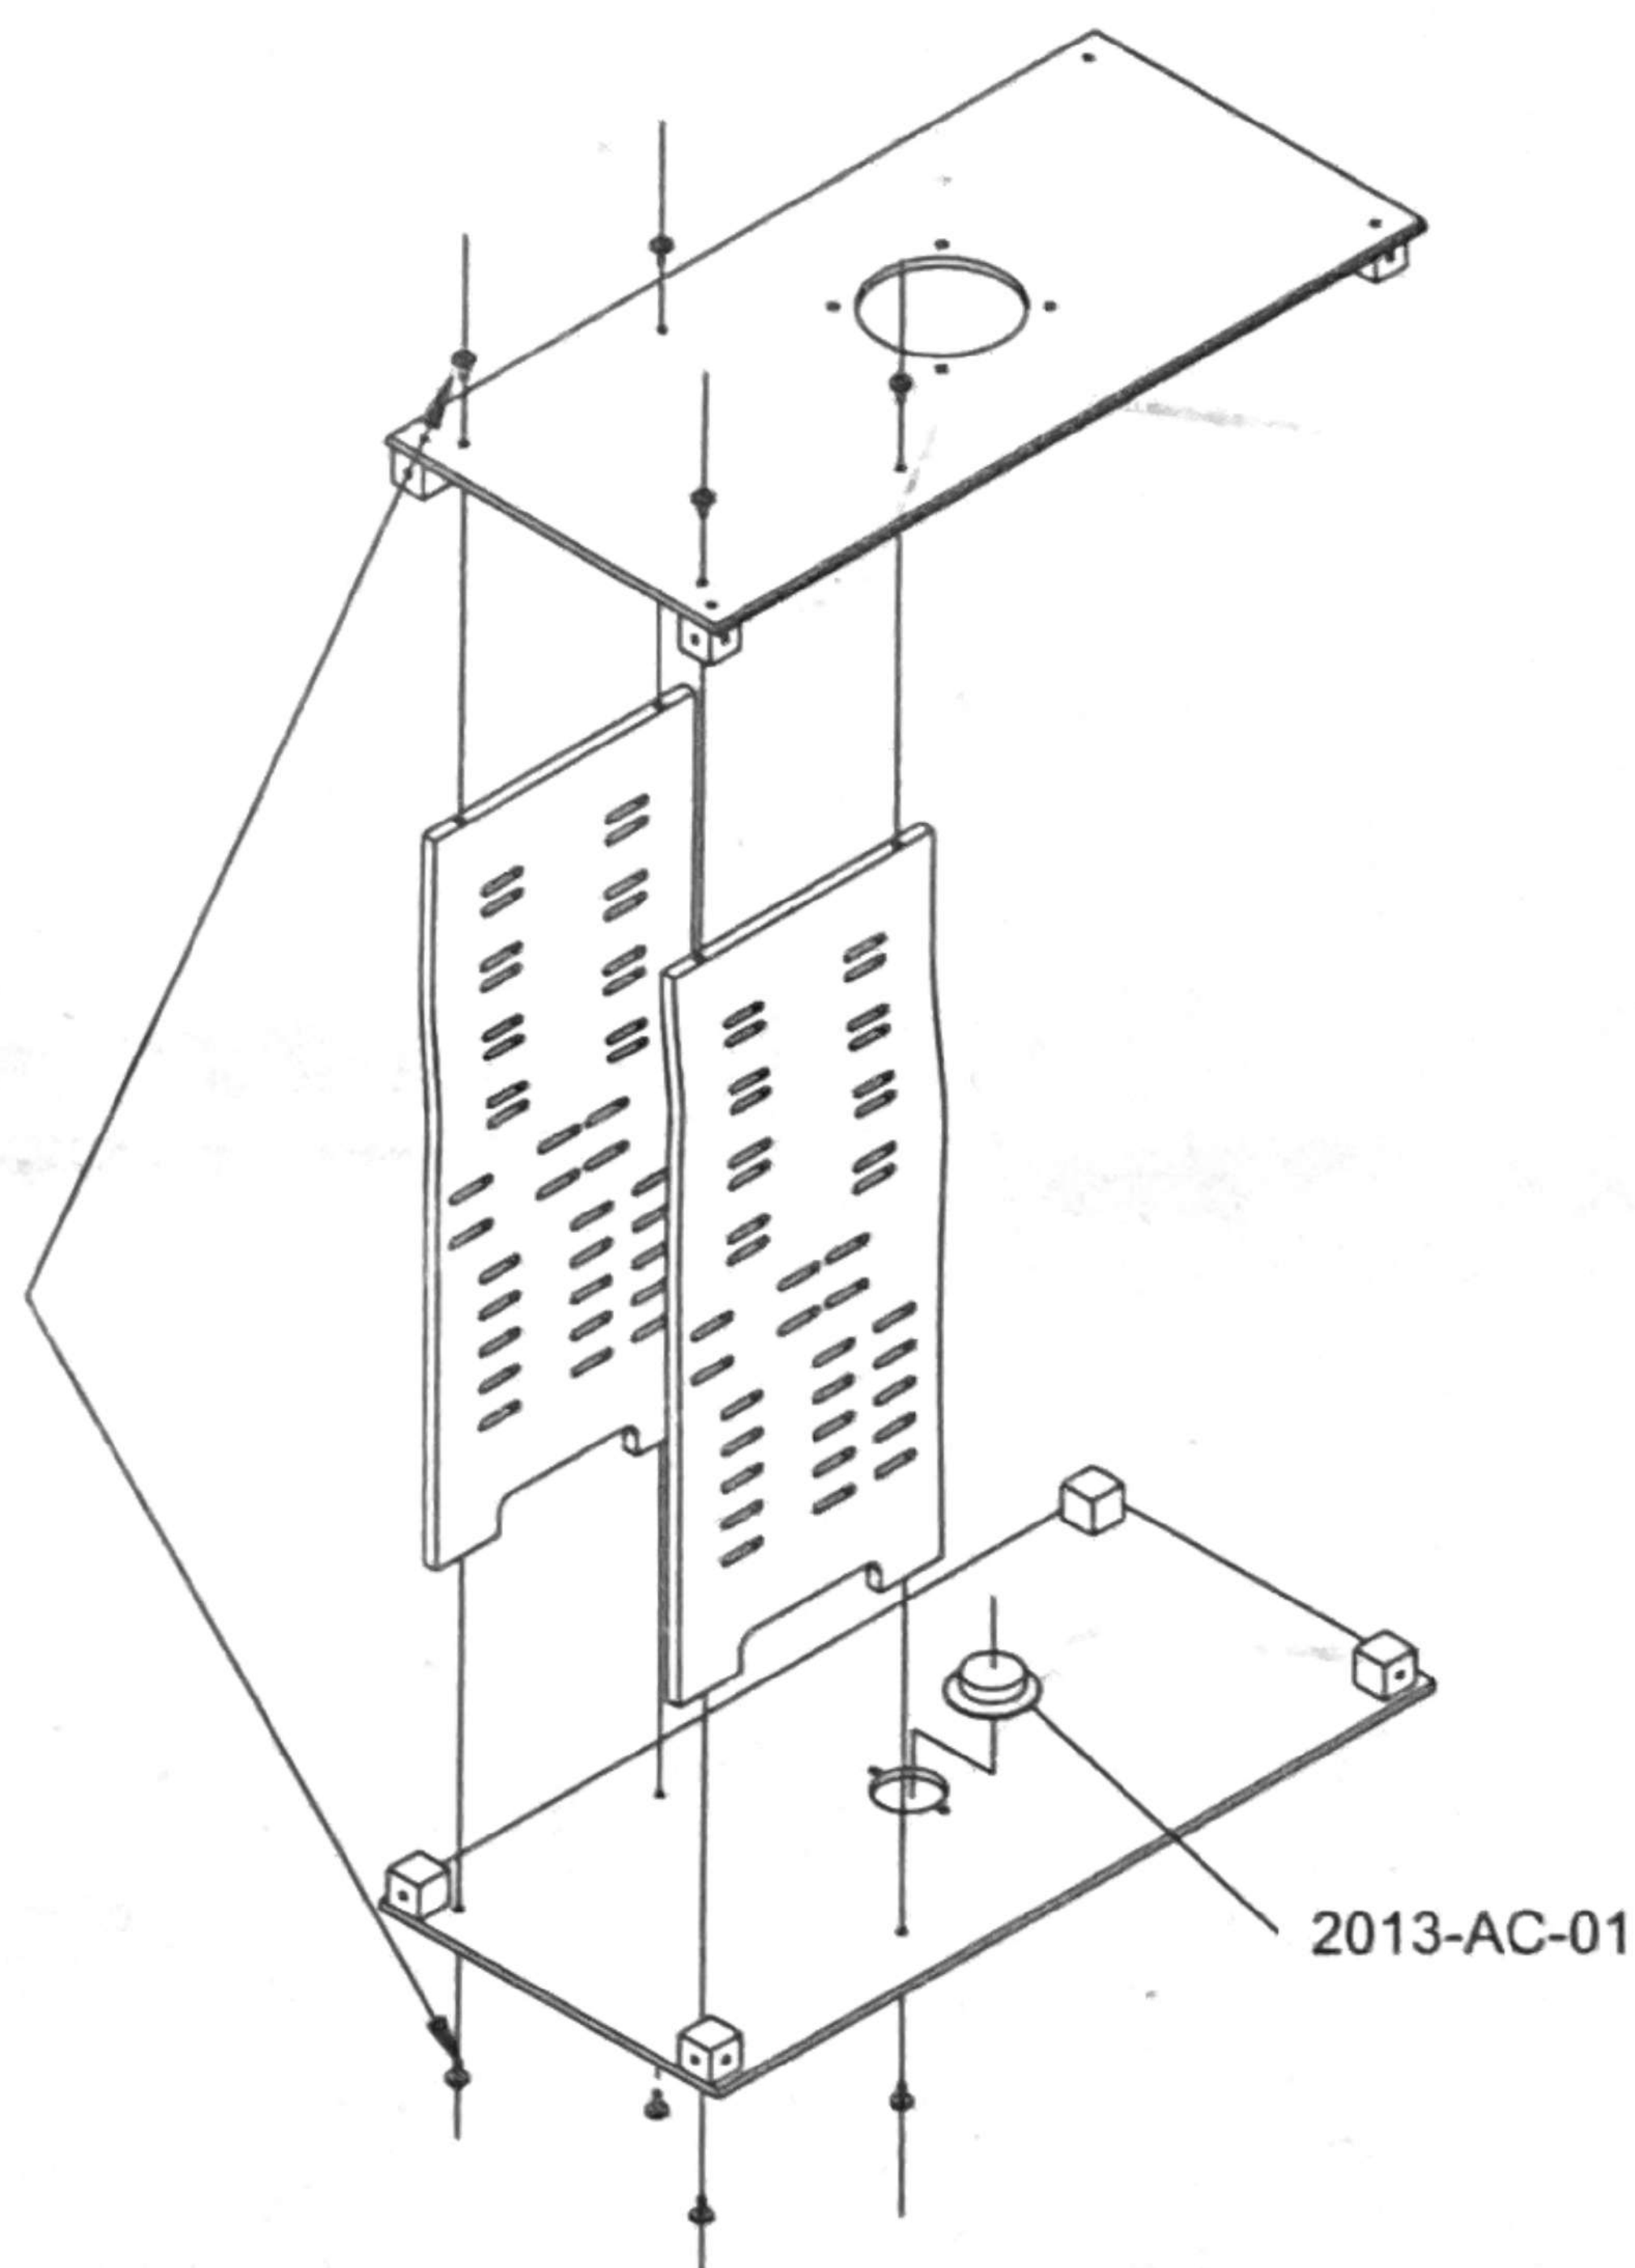

2013-AC-01

3

With some 5002-AC-18, assemble 7019-AC-01 to 3013-AC-02, then pick up 7x5002-AC-16 and assemble 7x7018-AC-01 to 7019-AC-01.

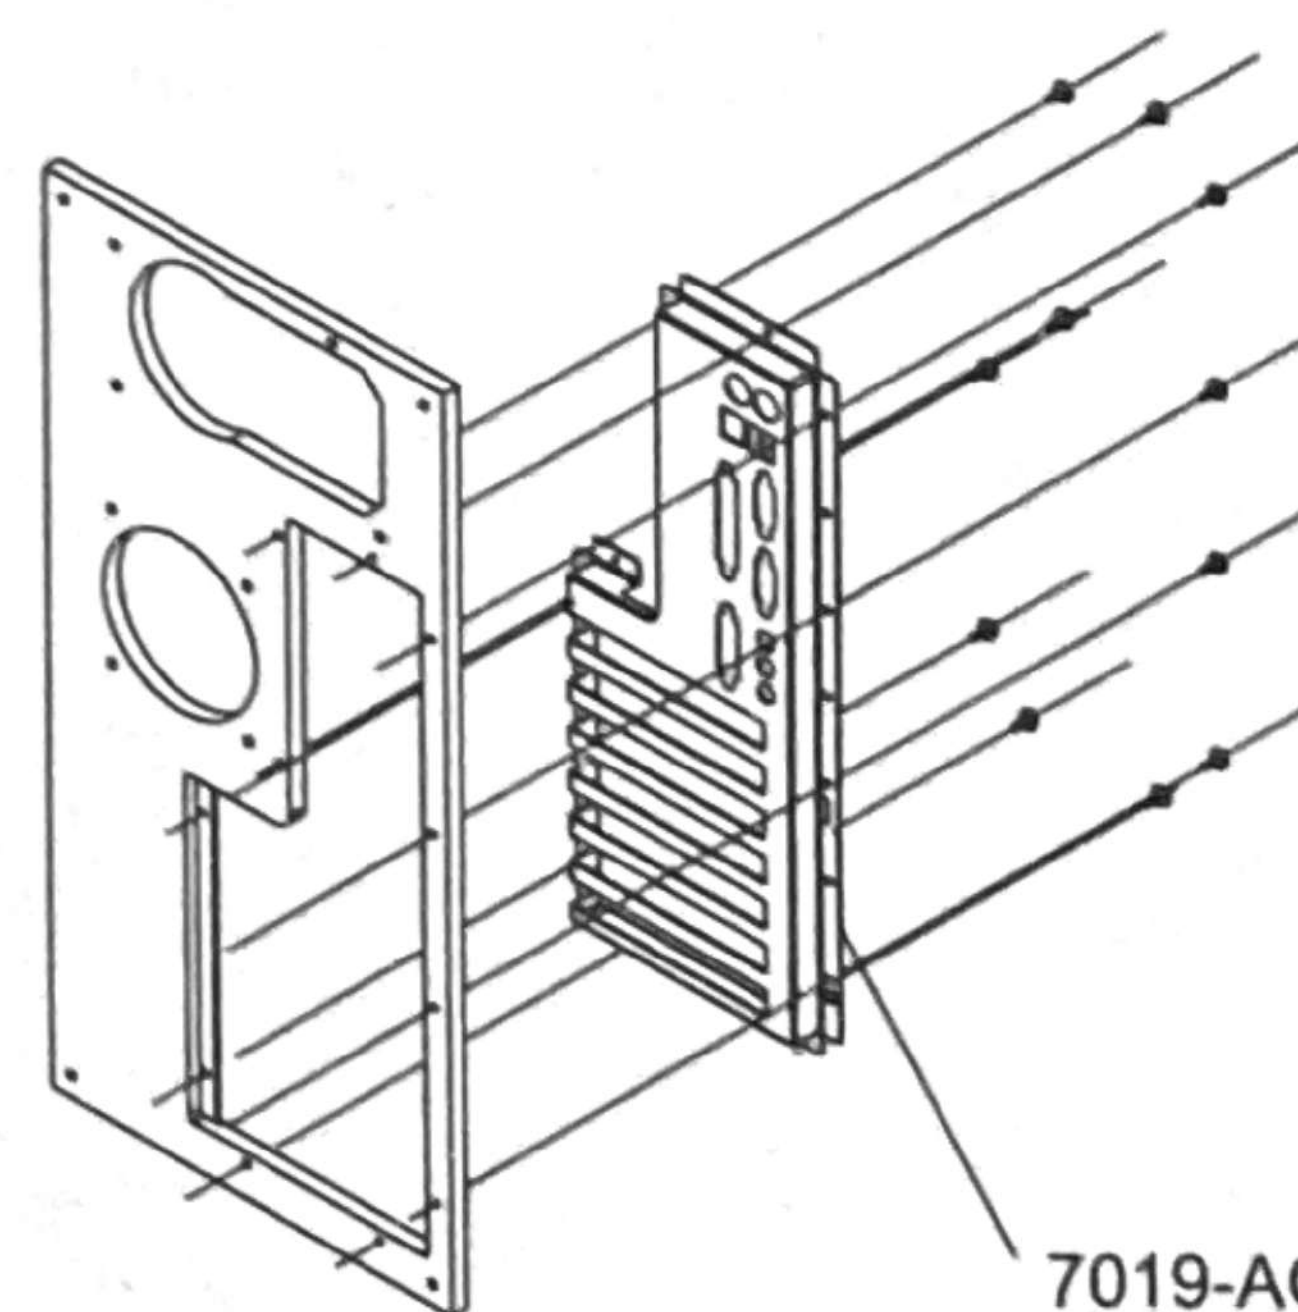


7019-AC-01

Assembly Diagram


④

Install 2003-AC-05 to 3013-AC-01 with 2x5005-AC-04 and 2x5003-AC-15, then pick up 8 PCS 8.0mm 5003-AC-01 to assemble 3013-AC-02 and 3013-AC-01.

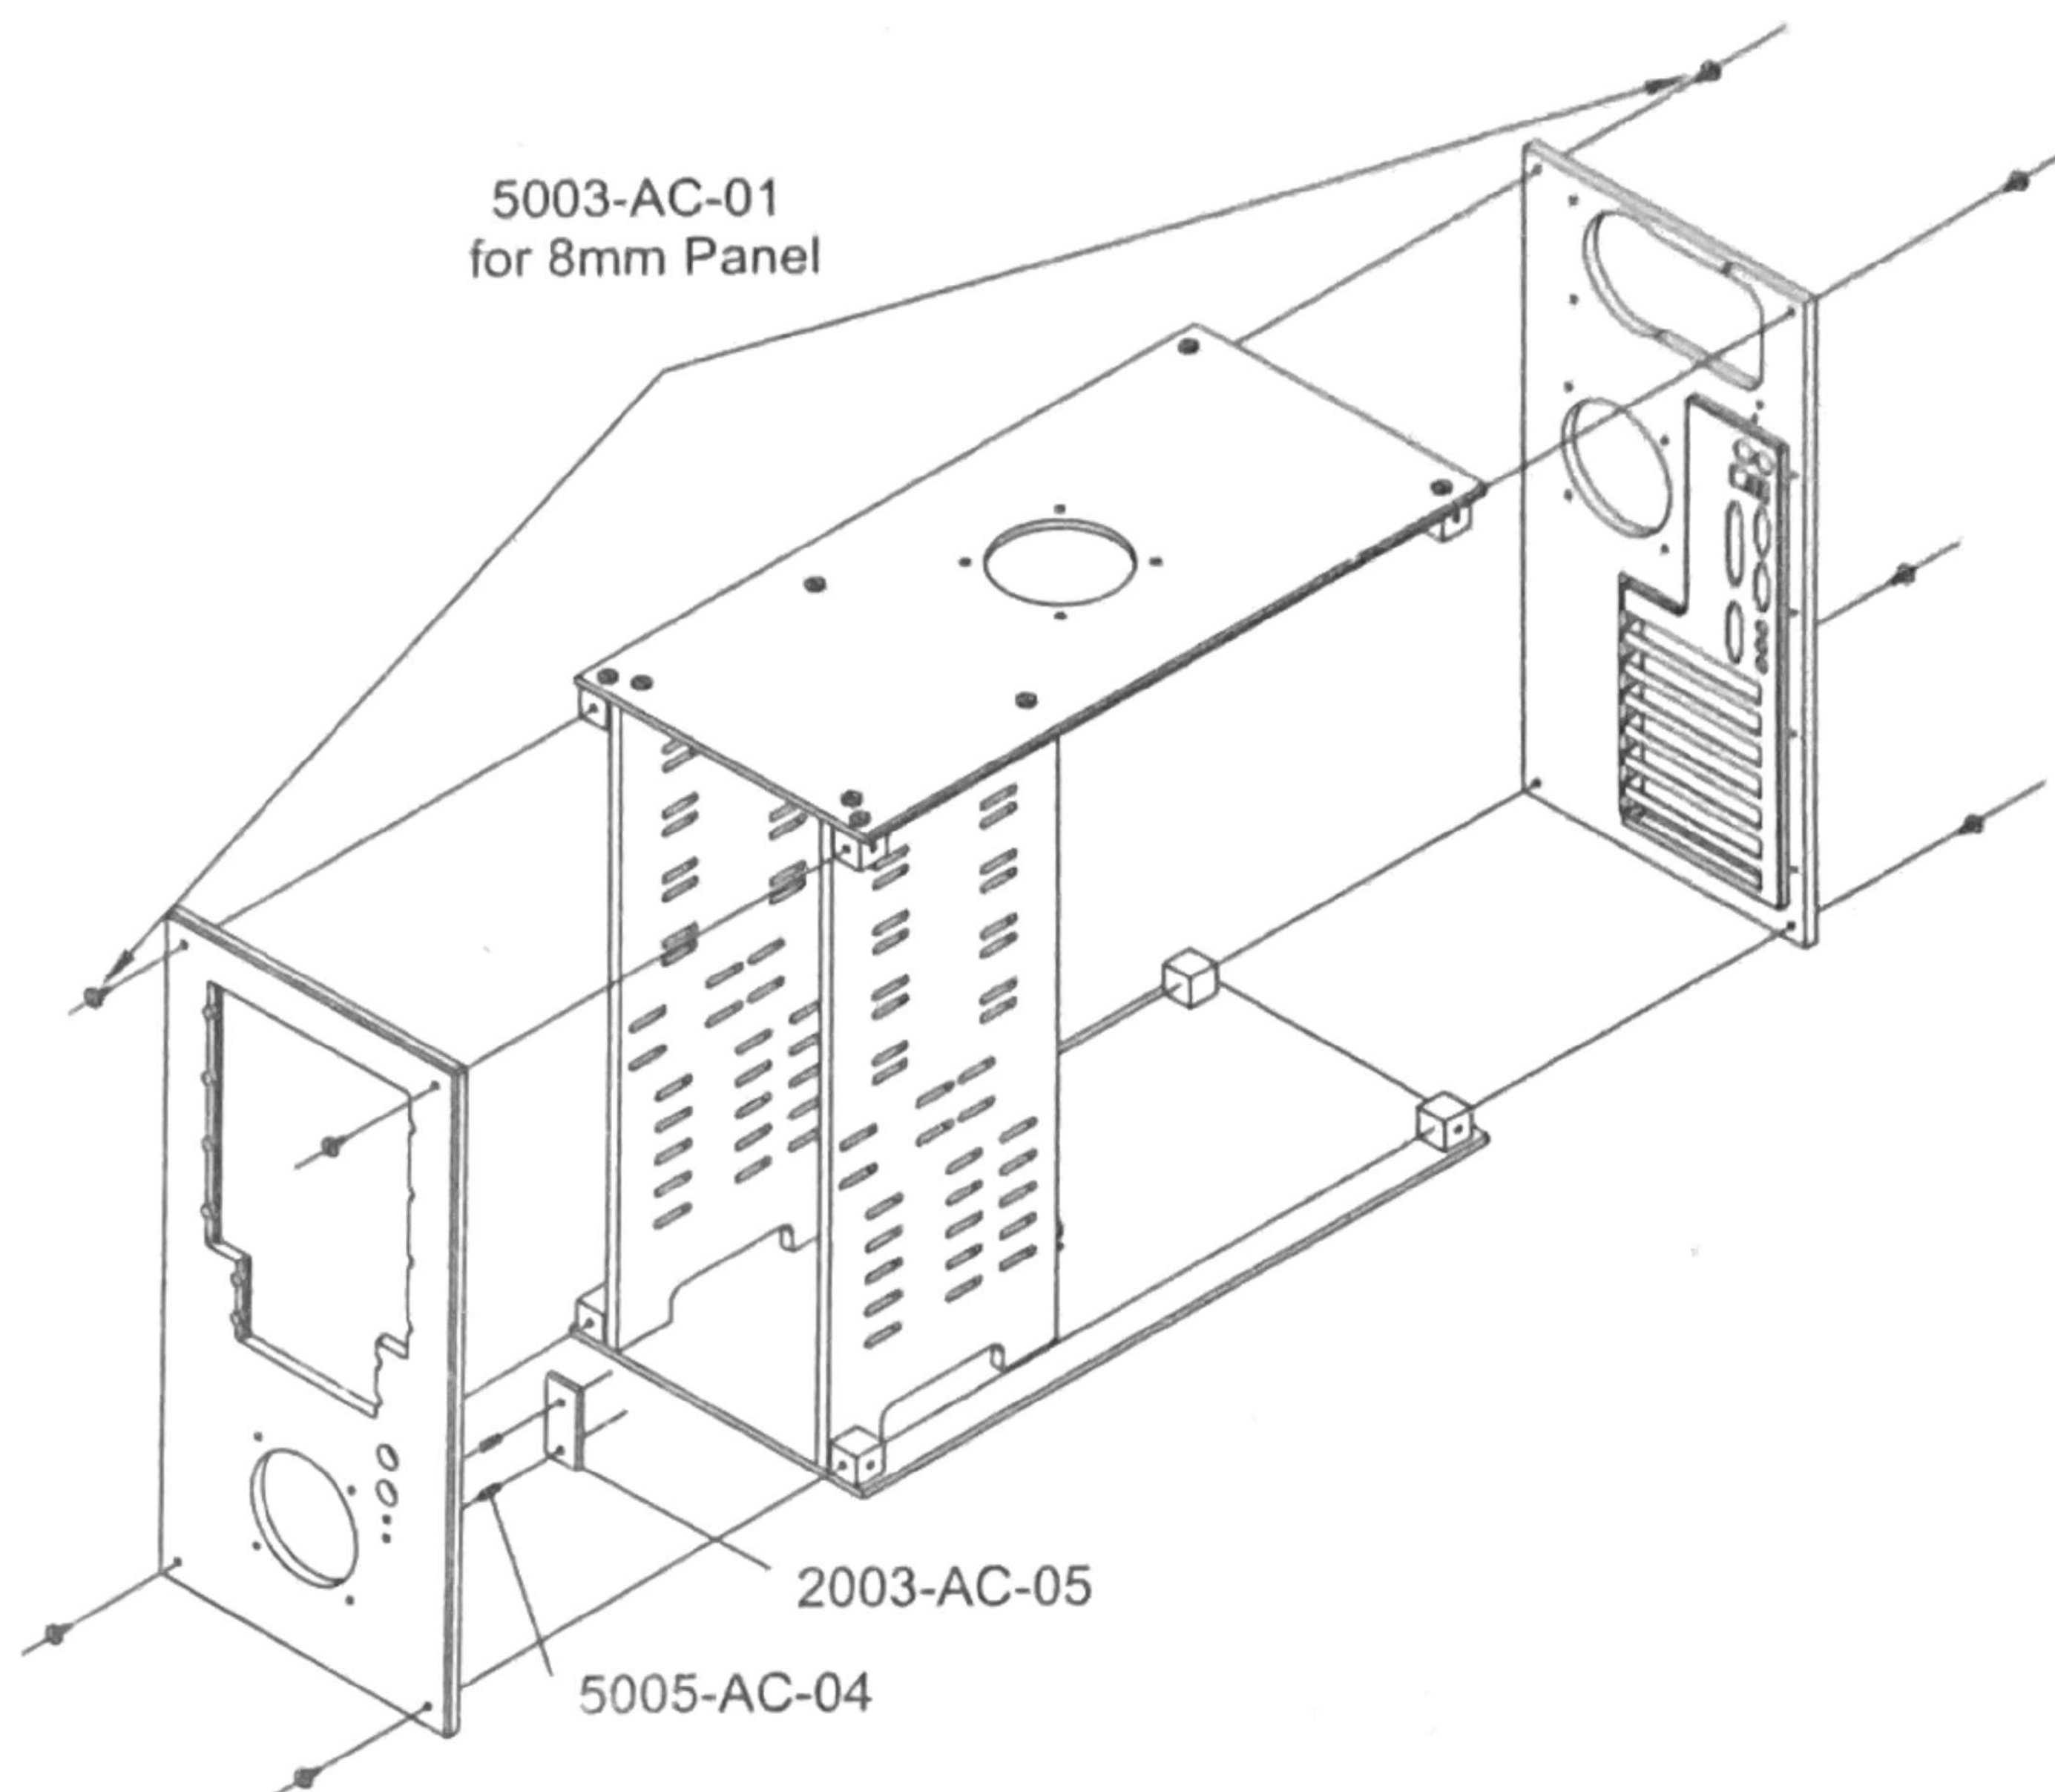

⑤

Install 9 PCS 5005-AC-03 to 3013-AC-05, then assemble 3013-AC-05 and 3013-AC-06 to your acrylic case with 8pcs 5.0mm 5003-AC-02.

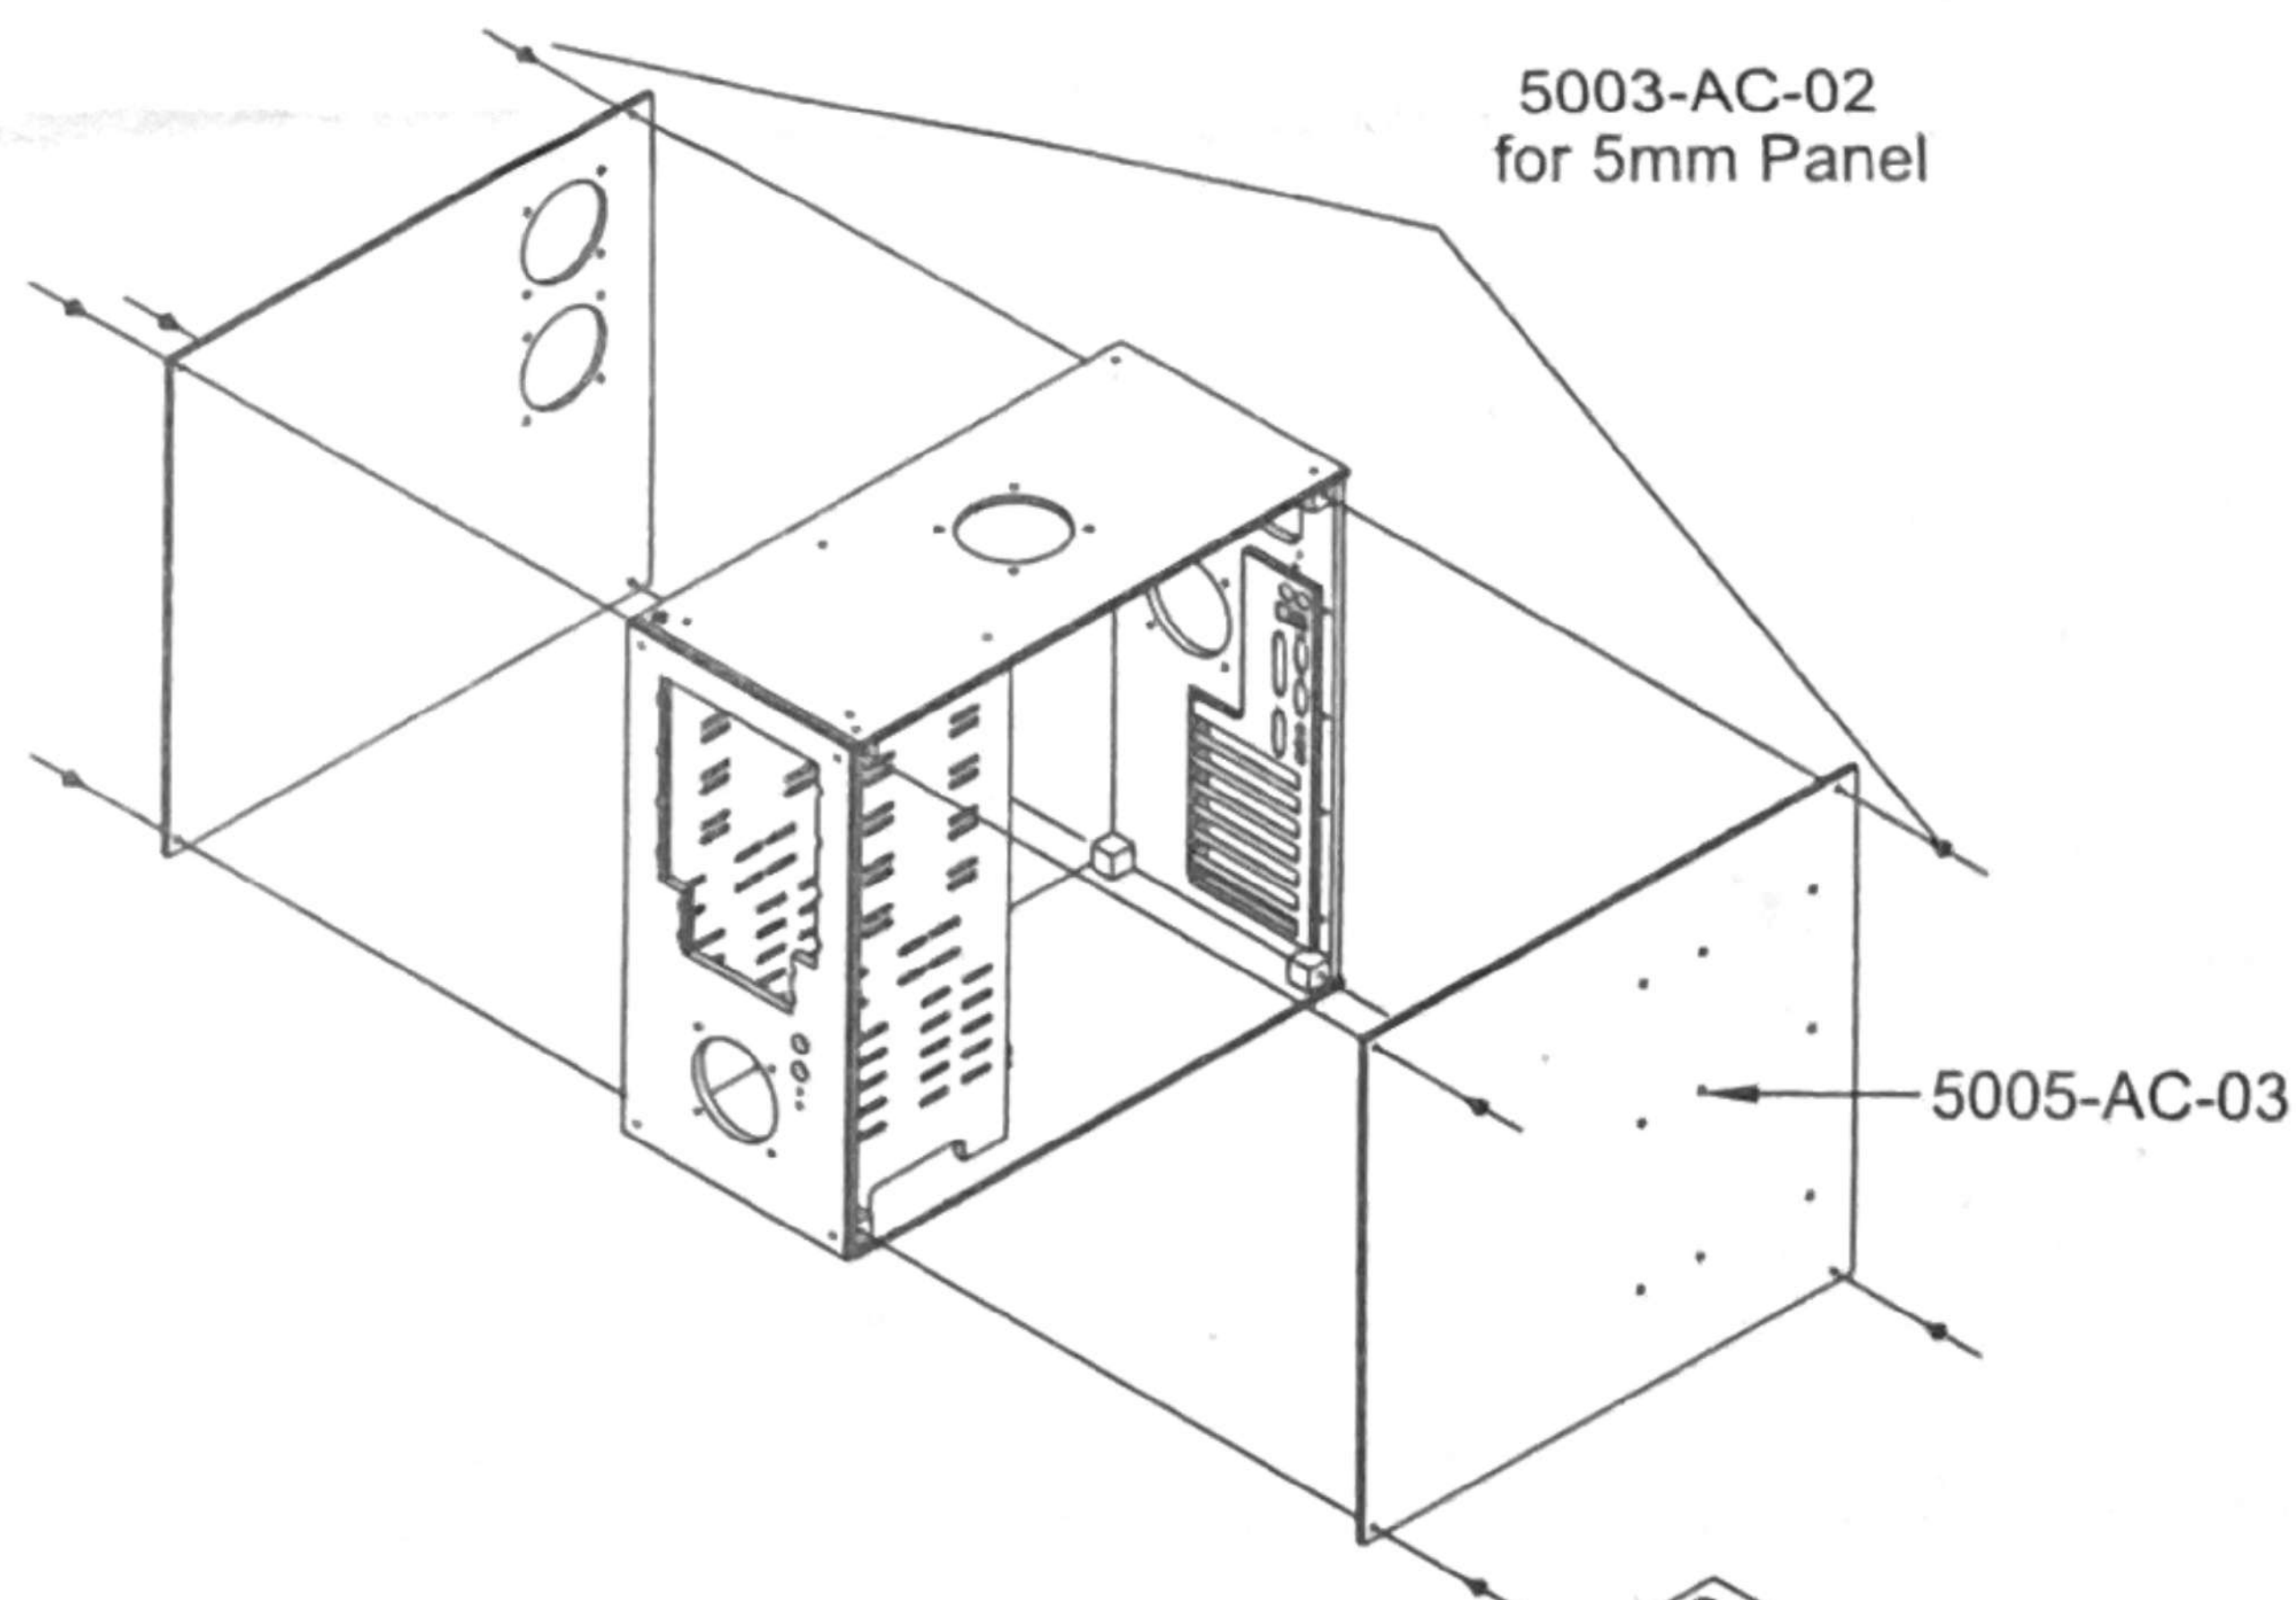

⑥

Assemble 4x3010-AC-03 and 2x3010-AC-04 to 3013-AC-01 with 12 PCS 5003-AC-03, stick 4 PCS 3015-AC-01 to 3013-AC-04.

