


Motherboard VX1

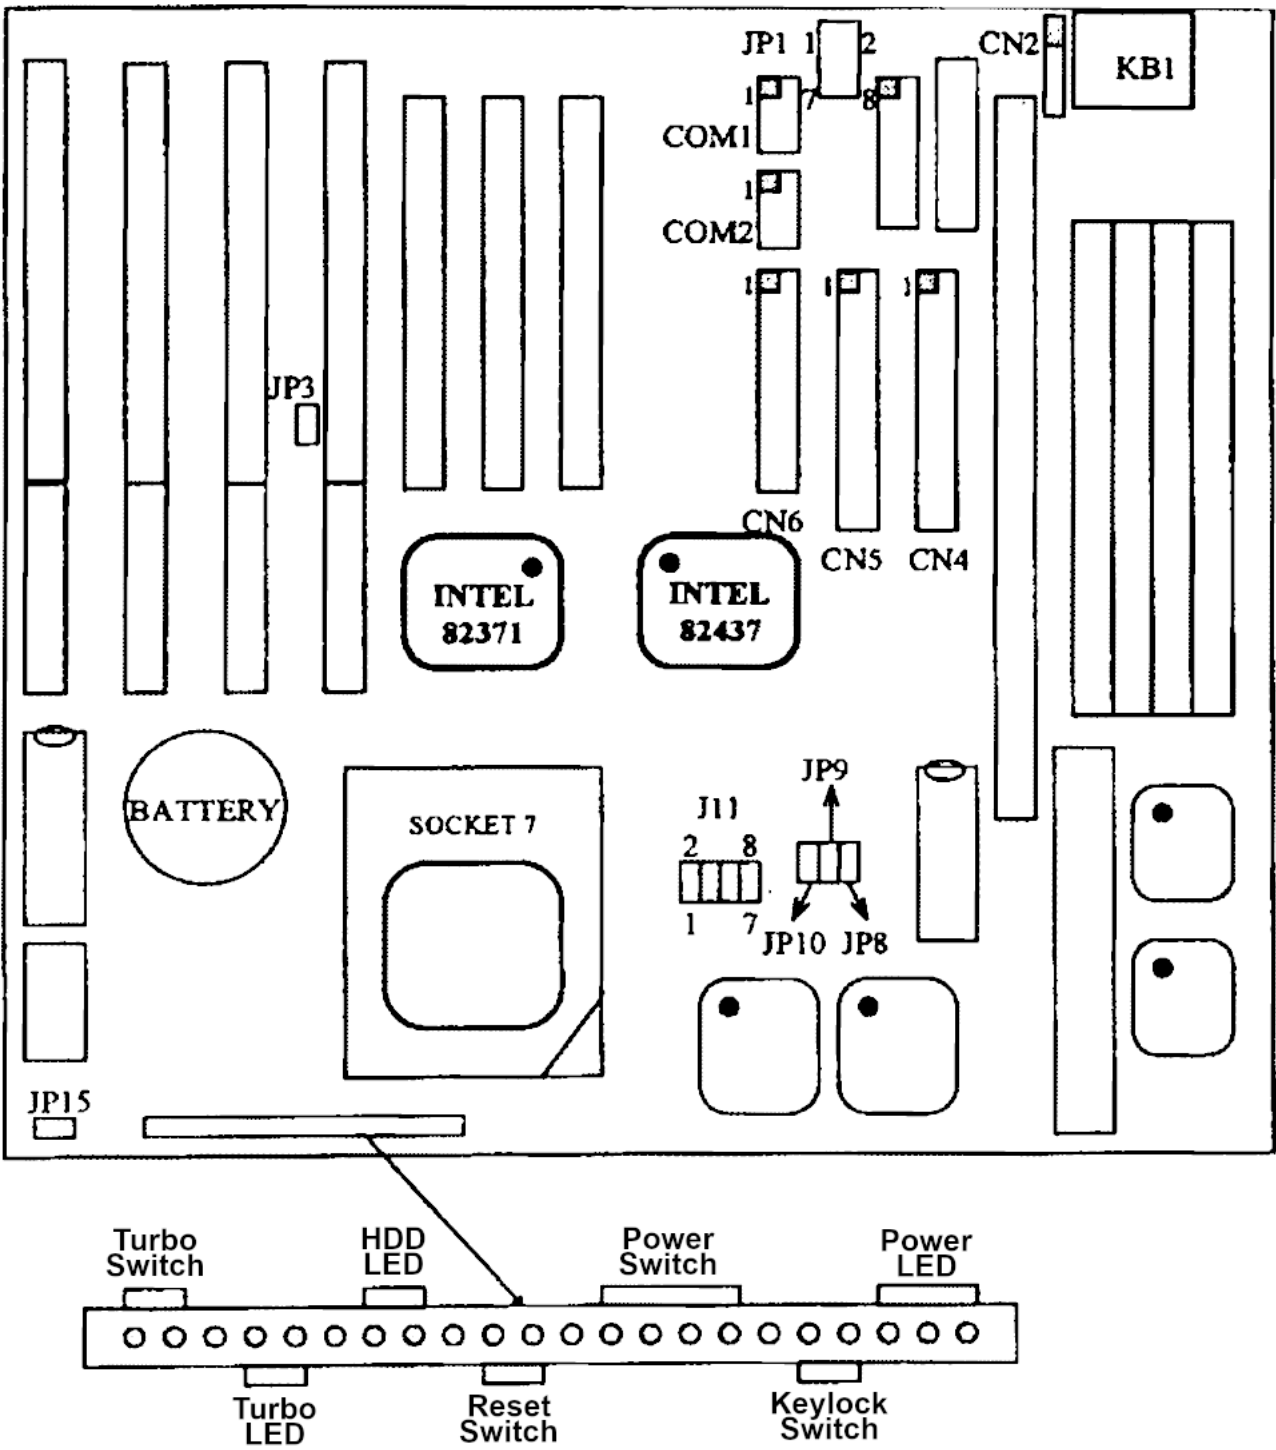

JP3: PS/2 Mouse Interface

	Active	Disabled
JP3	On	Off

J11: Intel/CyrixAMD CPU type

CPU Type	Bus Frequency	Multiplier	J11
IntelAMD 75Mhz	50MHz	1.5	5-6,7-8
Cyrix P120+	50MHz	2	3-4,5-6,7-8
Cyrix P133+	55MHz	2	3-4
Intel/AMD 90MHz	60MHz	1.5	7-8
Intel/AMD 100MHz	66MHz	1.5	5-6
Intel/AMD 120MHz Cyrix P150+	60MHz	2	3-4,7-8
Intel/AMD 133MHz Cyrix P166+	66MHz	2	3-4,5-6
Intel 150MHz	60MHz	2.5	1-2,3-4,7-8
Intel 166MHz	66MHz	2.5	1-2,3-4,5-6
Intel 180MHz	60MHz	3	1-2,7-8
Intel 200MHz	66MHz	3	1-2,5-6

Multiplier	1-2	3-4
1.5	.	.
2	.	x
2.5	x	x
3	x	.

Bus Frequency	5-6	7-8
50MHz	x	x
55MHz	.	.
60MHz	.	x
66MHz	x	.

JP8,9,10: Cache

	JP8	JP9	JP10	TAG RAM	Cache Size
Onboard - 0k COAST - No	.	.	.	No	0kb
Onboard - 256kb COAST - No	1-2	2-3	Off	8k/16k/32k x8	256kb
Onboard - 0k COAST - 256k	.	.	2-3	No	256kb
Onboard - 256k COAST - 256k	2-3	1-2	1-2	16k/32k x8	512kb
COAST - 512k or 256k	.	.	2-3	No	512k or 256k

Note: 1) Maximum Cache memory supported - 512kb

2) Highly recommended to purchase COAST from motherboard supplier.